

SCOT

MOTORPUMP™ — 3500 RPM

60 HERTZ, 2 X 1.5 X 6.5 NPT
LTC 50B, ALL BRONZE

50B

JP
LTC 50B

MOTOR DIMENSIONS

3500 RPM NEMA JP FRAME 3 PHASE ODP

FRAME	D	E	F	O	AB	BG	L*	MH
JM145	3.50	2.75	2.50	7.00	5.25	5.38	4.69	.34
JM182	4.50	3.75	2.75	9.00	5.88	5.88	4.94	.41
JM184	4.50	3.75	2.75	9.00	5.88	6.38	5.44	.41

*For TEFC Motor: Add 2" to "L" Dimension.

3500 RPM


HP	FRAME
2, 3	JP145
5	JP182
7.5	JP184




0505ODP D1254
0503500

50B
JP
LTC 50B


050BPLTC
81.001.593 M19

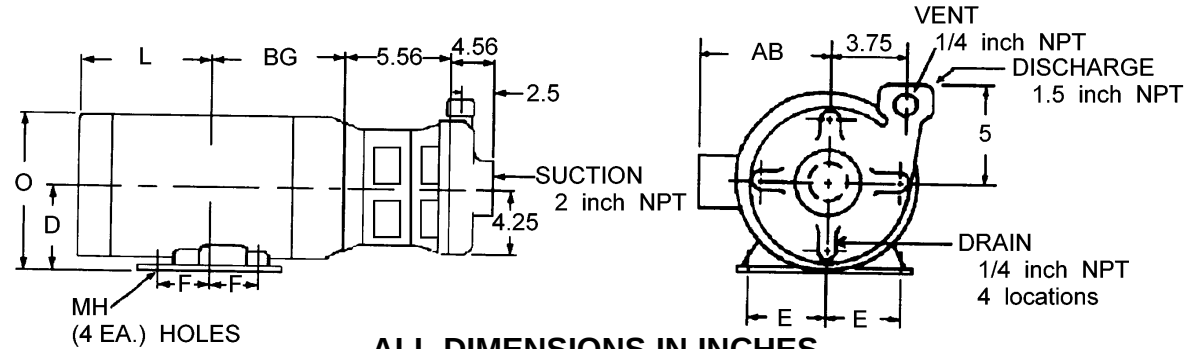

ALL DIMENSIONS IN INCHES

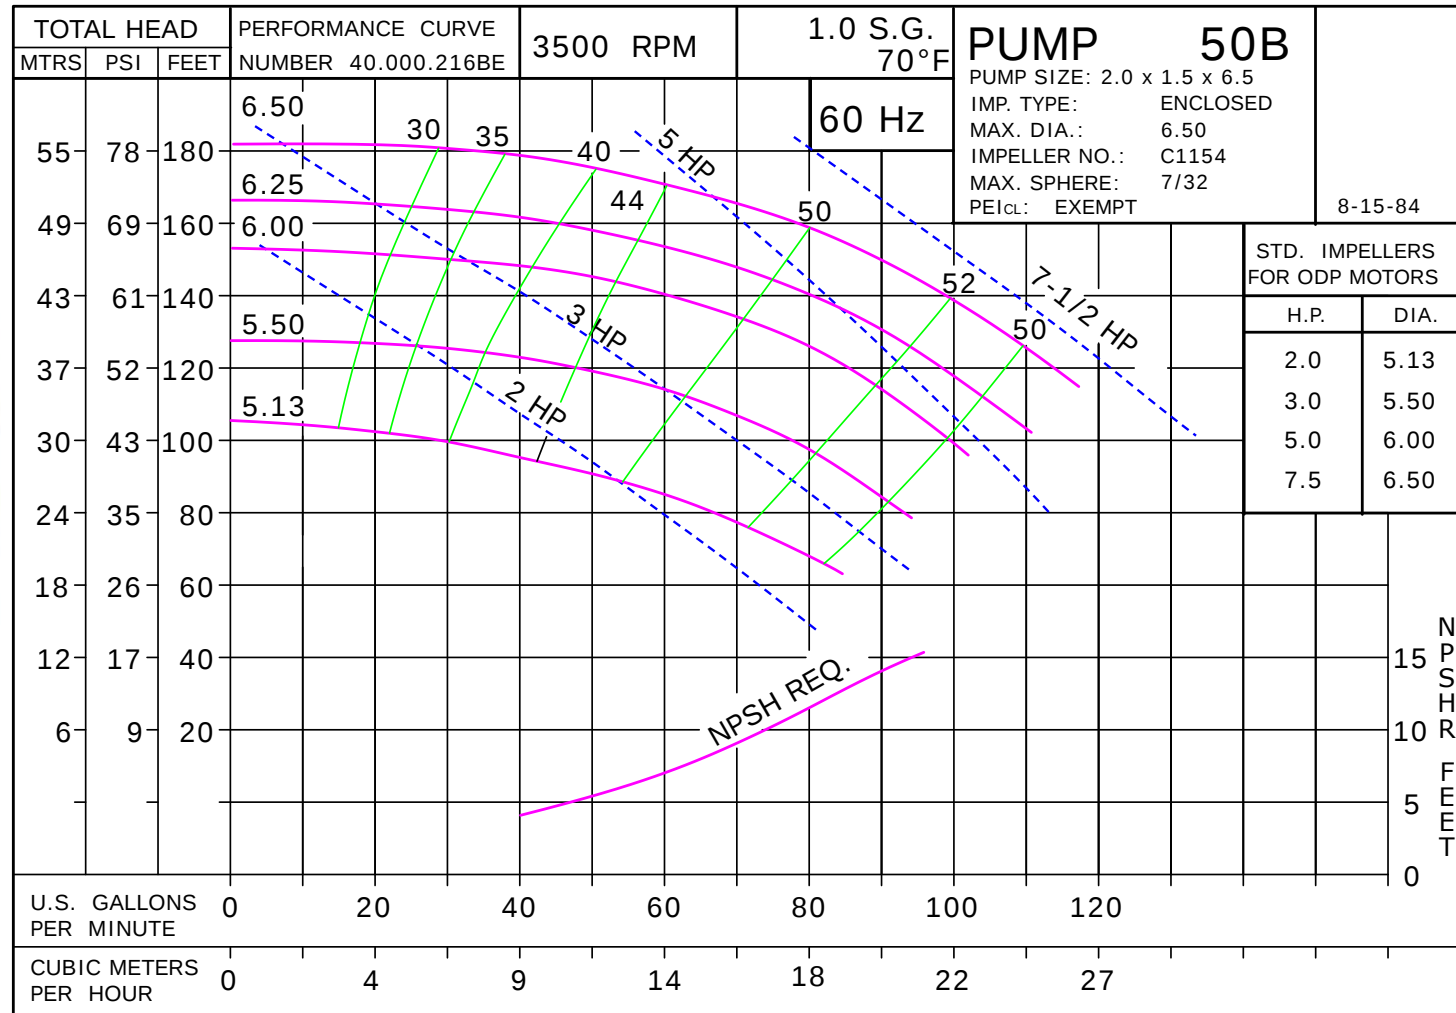

LTC 50B • Bronze • JP Frame • 3500 RPM

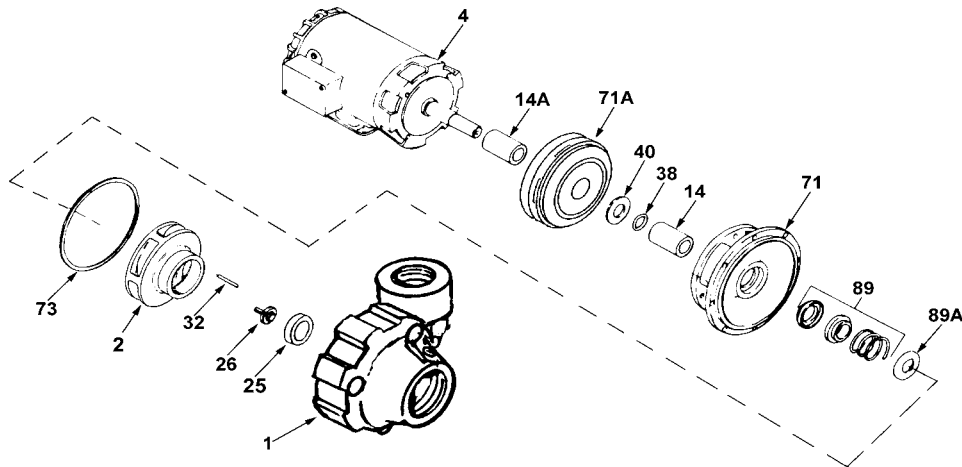

E1080

KEY NO.	PART NAME	PUMP NO. 50B
1+	CASE, BRONZE, 2 x 1.5 NPT	130.000.272BX
2	IMPELLER, 7/8" KEYED, ENCLOSED, SPECIFY DIAMETER: BRONZE	131.000.829
4	MOTOR, JP140/180	See Chart
14*	SHAFT SLEEVE, BRONZE	110.000.178
14A*	SHAFT SLEEVE, BRONZE	110.000.215
25	WEAR RING, BRONZE	103.000.135
26*	IMPELLER RETAINER, STAINLESS	118.000.163A
32*	KEY, STAINLESS	102.000.102
38*	O-RING, SHAFT, EPDM	116.000.117B
40*	FLINGER, STAINLESS	104.000.165
71	ADAPTER, BRONZE	132.000.228
71A	EXTENSION, IRON	137.000.762
73*	GASKET, CASE	116.000.157
89*	1½" SEAL TYPE 21, EPDM-CARB/SIL	101.000.175B
89A*	SEAL RETAINER, STAINLESS	104.000.174
--	REPAIR KIT	118.000.561
* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.		
+ INCLUDES BRONZE WEAR RING.		