


Little GIANT[®]

Pump Company

VCC-20 SERIES

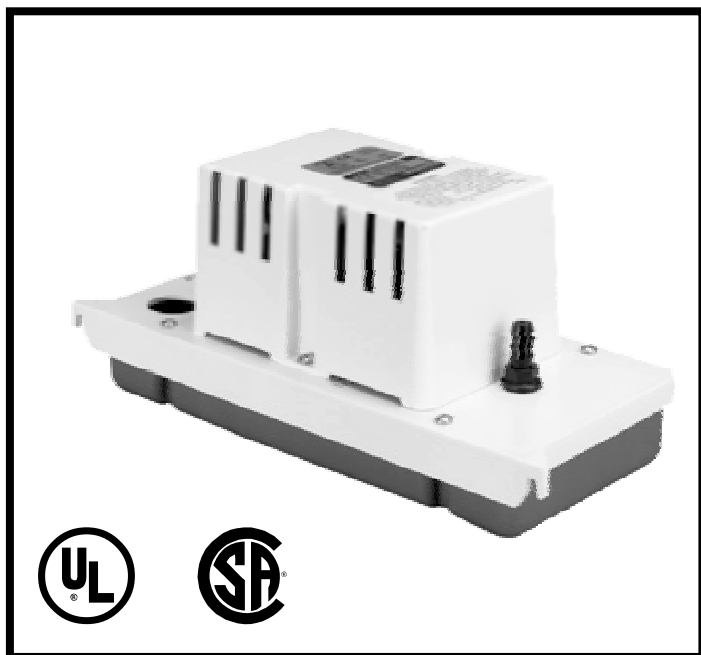

Features

- Low profile compact size
- Vertical type pump unit
- Leakproof, rustproof, ABS tank
- Stainless steel motor shaft
- 3/8" O.D. barbed discharge adapter
- Safety switch included
- 20' shut-off head
- 6' power cord
- UL/CSA listed
- Thermal overload protected
- Suitable for High-Efficiency, gas furnace condensate



Construction

- Motor — 1/30 HP
- Intermittent Liquid Temp. up to — 120° F
- Discharge — 3/8" OD barbed
- Housing — ABS
- Cover — ABS
- Volute — ABS
- Impeller — Glass filled polypropylene

The VCC Series is a low profile compact size for applications with limited space. The reservoir has a 3/10 gallon capacity. Pumps feature a vertical-type pump with stainless steel motor shaft, rust proof, high impact ABS tank and motor cover. Discharge is a 3/8" O.D. barbed tubing adapter/check valve. Pump features a safety switch that can be connected to shut down the air conditioner condenser or wired to an alarm to warn of possible tank overflow. Pump is rated for high-efficiency gas furnace applications that produce an acidic condensate. Thermally protected motor is UL and CSA listed.


Little Giant Pump Co.

VCC-20 SERIES

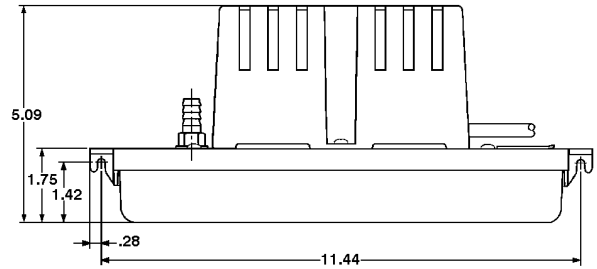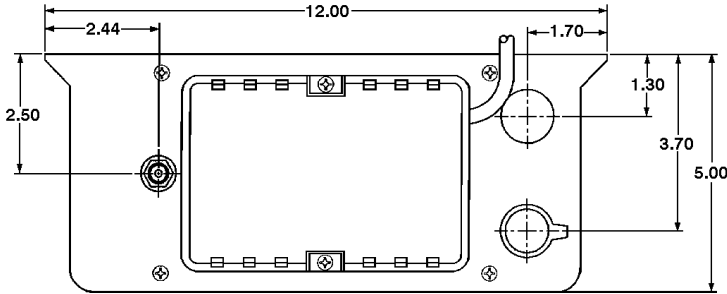

Specifications

Model No.	Item No.	Discharge Size	Listing(s)	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)				Shut Off Feet	Pwr. PSI	Pwr. Cord (ft)	Weight (Lbs.)
									1'	5'	10'	20'				
VCC-20ULS	554200	3/8" OD Barbed	UL/CSA	1/30	115	60	1.5	93	80	70	45	0	20	8.7	6	5.40
VCC-20ULS	554210	3/8" OD Barbed	UL	1/30	230	50/60	0.6	75	80	70	45	0	17	7.4	6	5.40

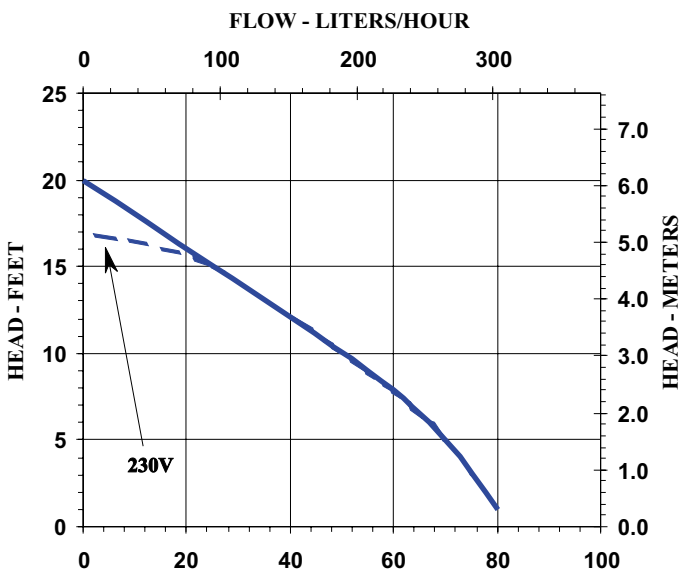

Replacement Parts

Tank	154004
Cover, Tank	154005
Motor Assy	979554
Impeller	154009
Volute	154015
Cover, Motor	154006
Check Valve	154715
Switch, Pump	950337
Seal Ring	928006
Safety Switch	154714
Float/Stem	154017
Adapter, 1/4"	154037

Little Giant Pump Co.

PO Box 12010
Okla. City, OK 73157

Phone: 405.947.2511
Fax: 405.228.1550

www.LittleGiantPump.com

Form No. 995123 - 12/00