

2E-NDVR SERIES



Features

- Non-submersible mild acid pump
- Two Viton® shaft seals
- Nylon volute & impeller
- 3/8" FNPT intake with 1/2" hose adapter
- Epoxy coated aluminum housing & cover
- 1/4" MNPT & discharge
- Thermally protected


Construction

- Motor 1/40 HP
- Intermittent Liquid Temp. up to 120° F
- Intake 3/8" FNPT
- Discharge 1/4" MNPT
- Housing Aluminum
- Cover Aluminum
- Volute Nylon
- Impeller Nylon
- Shaft Seal Viton®

Double-Viton® seal acid pump. Non-submersible pump for use with weak acids and chemicals, fruit juice, cleaning solvent, anti-freeze and fluids with a pH factor of 6 to 7. Nylon volute with a 3/8" FNPT intake (nylon adapter included for 1/2" hose intake) and 1/4" MNPT discharge. Stainless steel plate and motor shaft with inner and outer Viton® seals. Thermally protected motor.


Little Clant Rump Co.

2E-NDVR SERIES

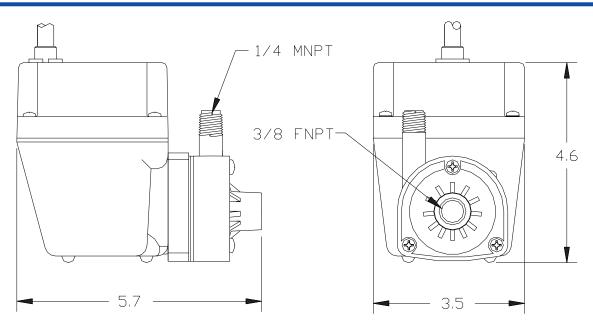

Specifications

Model	Item			Performance (GPH @ Head)						l @ Head)	Shut Off	Pwr. Cord	Weight		
No.	No.	Discharge	Intake	Listings	HP	Volts	Hertz	Amps	Watts	1'	3'	5'	Feet PSI	(ft)	(Lbs.)
2E-NDVR	502303	1/4" MNPT	3/8" FNPT		1/40	115	60	1.7	100	300	255	205	11.8 5.1	6	5.00

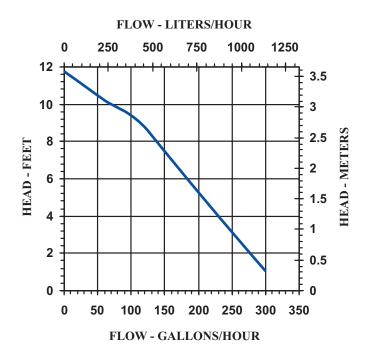

Replacement Parts

Volute	102334
Impeller	102437
Seal Plate	102512
O-ring	924005
Gasket	102601

Little Giant Pump Co.

PO Box 12010 Phone: 405.947.2511 Okla. City, OK 73157 Fax: 405.228.1550 **www.LittleGiantPump.com**