


95 SERIES



Features


- Handles liquids and solid waste materials up to
 2 diameter.
- Cast iron pump housing with protective epoxy coating for corrosion resistance
- Oil-filled motor housing for lifetime lubrication and rapid heat dissipation
- Stainless steel fasteners
- Mechanical seals (stainless steel spring, nitrile parts, carbon and ceramic faces)
- Thermal overload protection
- Manual and Automatic models in each size.
- Automatic operation has 9 to 14 "On" level and 2 to 6 Off " level range with piggyback mechanical float switch.
- All 115 volt models are UL/CSA listed.

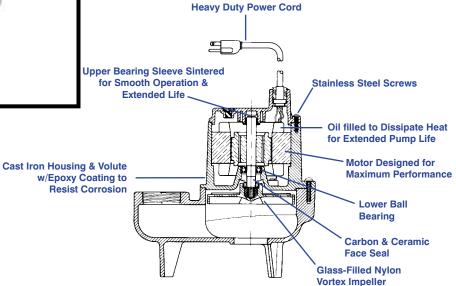


For residential, medium commercial and agricultural, and light industrial applications, the Model 9S Series Wastewater and Sewage Ejector pumps feature a 2" discharge, with a maximum lift of 18'. Cast iron housing and volute have a protective epoxy coating.

Little Clant Rump Co.

95 SERIES SEWAGE PUMP






Specifications

MODEL	ITEM NO.		НР	VOLTS	SOLIDS SIZE (Dia. In.)	RUNNING AMPS/WATTS	PERFORMANCE (GPM @ HEAD)				SHUT0FF		PWR. CRD. WEIGHT		DIMENSIONS
NO.		LISTING					5'	10'	15'	20'	(Ft.) P.S.	P.S.I.	(Ft.)	(Lbs.)	(H x L x W in.)
9S-CIM	509400	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	15	36	11.6 x 10.3 x 6.8
9S-CIA-RFS	509500	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	15	36	11.6 x 10.3 x 6.8
9S-CIM	509450	_	4/10	230	2"	6.5/1020	80	50	16	_	18	7.8	15*	36	11.6 x 10.3 x 6.8
9S-CIA-RFS	509520	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	20	37	11.6 x 10.3 x 6.8
9S-CIA-RFS*	509510	UL/CSA	4/10	115	2"	13/1020	80	50	16	_	18	7.8	15	37	11.6 x 10.3 x6.8

^{*3&}quot; discharge RFS - Piggyback Mechanical Float Switch

* w/out plug



Construction

Cover	Nylon						
Motor Housing	Epoxy Coated Cast Iron						
Impeller Material	Nylon						
Impeller Type	Vortex						
Volute	Epoxy Coated Cast Iron						
Power Cord	SJTW						
Mechanical Shaft Seal	Nitrile with carbon and ceramic faces						
Fasteners	Stainless Steel						
Shaft	Steel						
Bearings	Upper sintered sleeve and						
	lower ball bearing						

PUMP PERFORMANCE CURVE

115V 60Hz



Little Giant Pump Co.

\$ Form No. 994342 - 11/99

ISO 9001 CERTIFIED