

SCOT


MOTORPUMP™ — 3500 RPM
60 HERTZ, 2 X 1.5 X 5.63 NPT
LTC 19G

19G
JP
LTC 19G


MOTOR DIMENSIONS

NEMA JP FRAME 3 PHASE 3500 RPM

HP	Type	Frame	D	E	F	O	AB	BG	L	MH
2/3	ODP	JP145	3.50	2.75	2.50	7.00	5.25	5.38	4.69	0.34
5	ODP	JP182	4.50	3.75	2.75	9.00	5.88	5.88	4.94	0.41
7.5	ODP	JP184	4.50	3.75	2.75	9.00	5.88	6.38	5.44	0.41
2	TEFC	JP145	3.50	2.75	2.50	7.00	5.25	5.38	6.69	0.34
3	TEFC	JP182	4.50	3.75	2.25	8.69	5.87	5.13	12.65	0.41
5	TEFC	JP182	4.50	3.75	2.75	9.00	5.88	5.88	6.94	0.41
7.5	TEFC	JP184	4.50	3.75	2.75	9.00	5.88	6.38	7.44	0.41

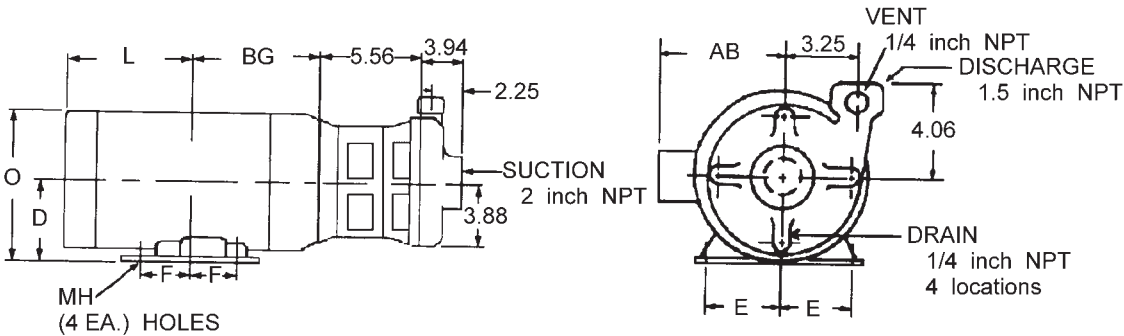


ALL DIMENSIONS IN INCHES.

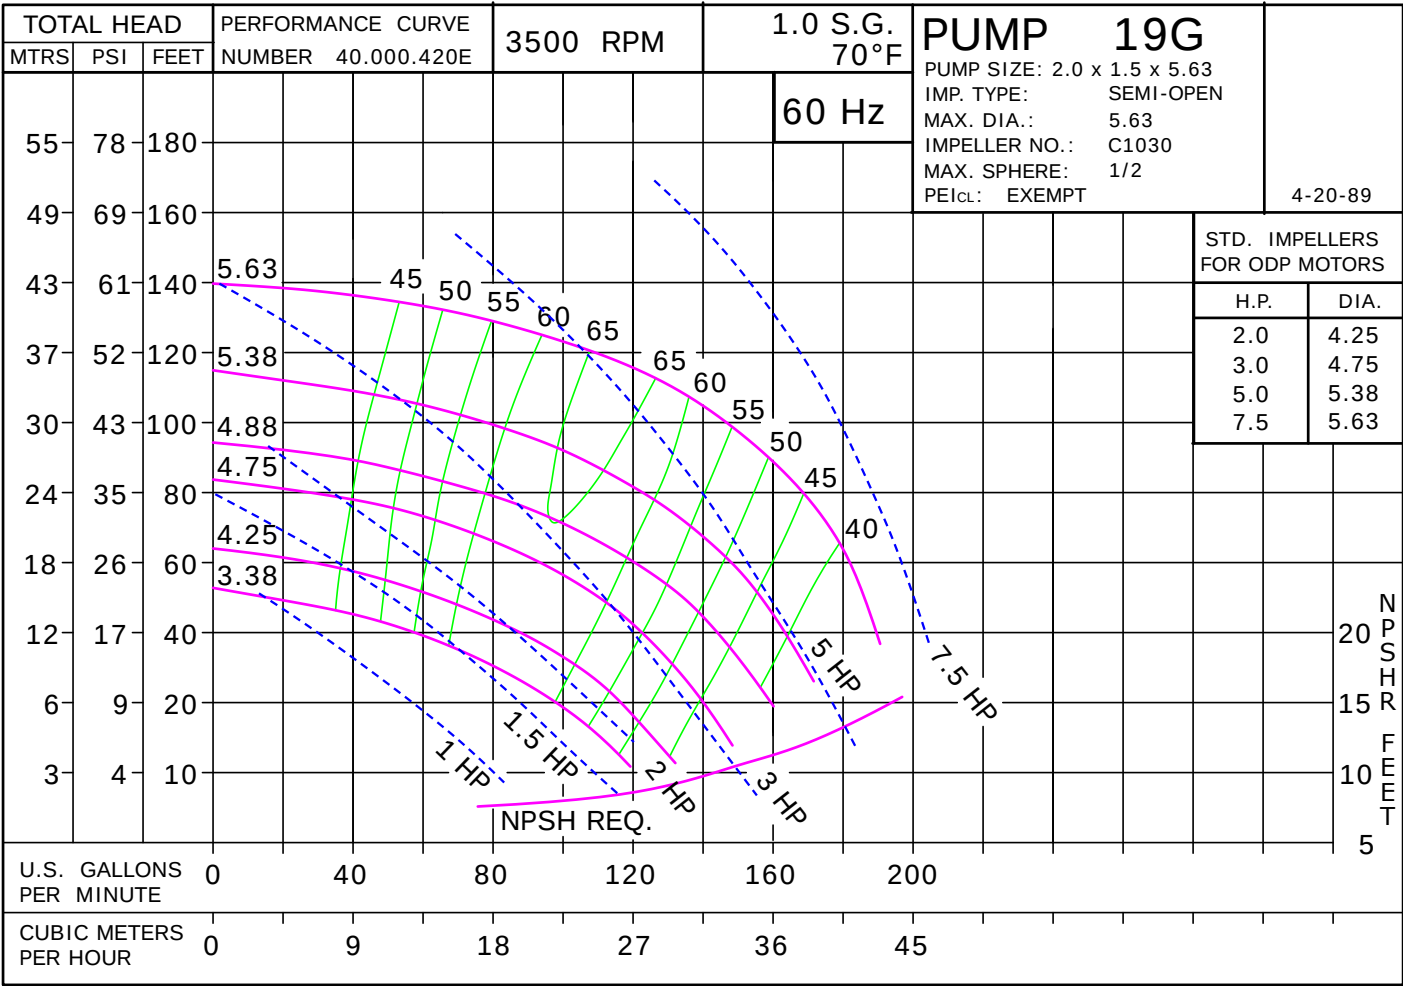

019G75LTC D1261
019G3500

19G
JP
LTC 19G 019GJPLTC
81.001.527 M19

LTC 19G • Iron • JP Frame • 3500 RPM

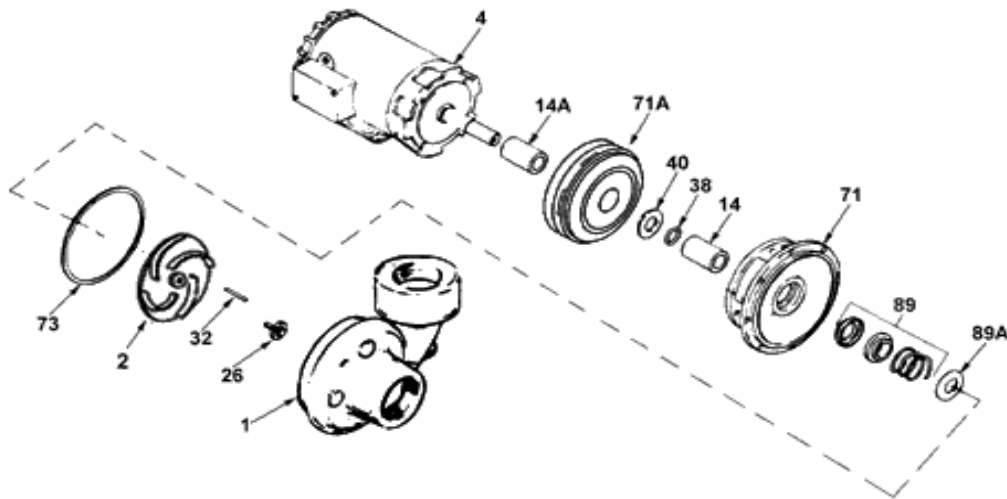

E1189

KEY NO.	PART NAME	PUMP NO. 19G
1	CASE, IRON, 2 x 1.5 NPT	130.000.344X
2	IMPELLER, 7/8" KEYED, SEMI-OPEN, SPECIFY DIAMETER:	
	IRON	137.000.135
	BRONZE	137.000.124
4	MOTOR, JP140/180	See Chart
14*	SHAFT SLEEVE, BRONZE	110.000.178
14A*	SHAFT SLEEVE, BRONZE	110.000.215
26*	IMPELLER RETAINER, STAINLESS	118.000.111A
32*	KEY, STAINLESS	102.000.102
38*	O-RING, SHAFT, EPDM	116.000.117B
40*	FLINGER, STAINLESS	104.000.165
71	ADAPTER, IRON	132.000.194X
71A	EXTENSION, IRON	137.000.762
73*	GASKET, CASE, EPDM	116.000.146A
89*	1½" SEAL	
	TYPE 21, EPDM-CARB/SIL	101.000.175B
89A*	SEAL RETAINER	104.000.175
--	REPAIR KIT	118.000.560
* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.		