
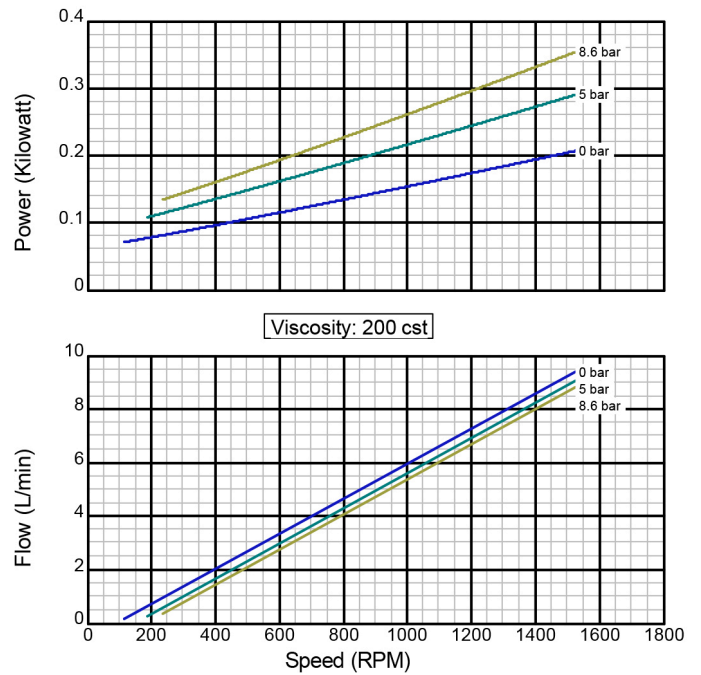
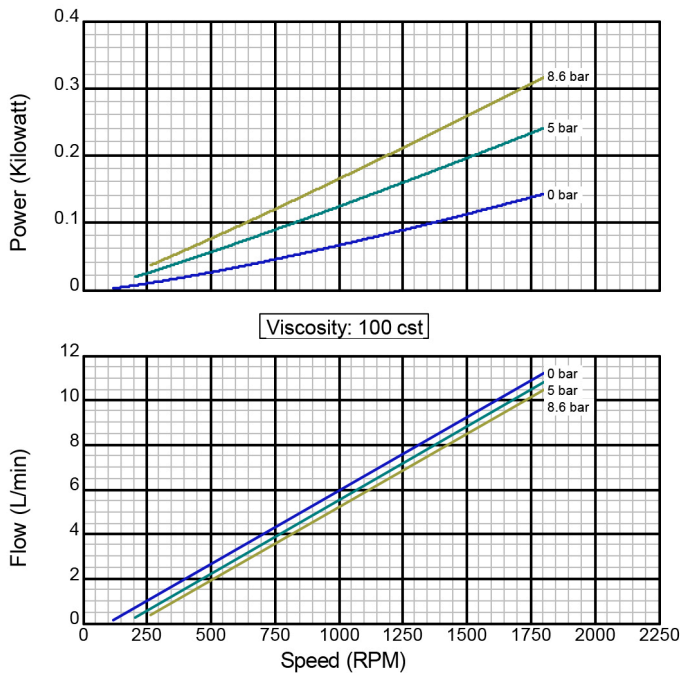
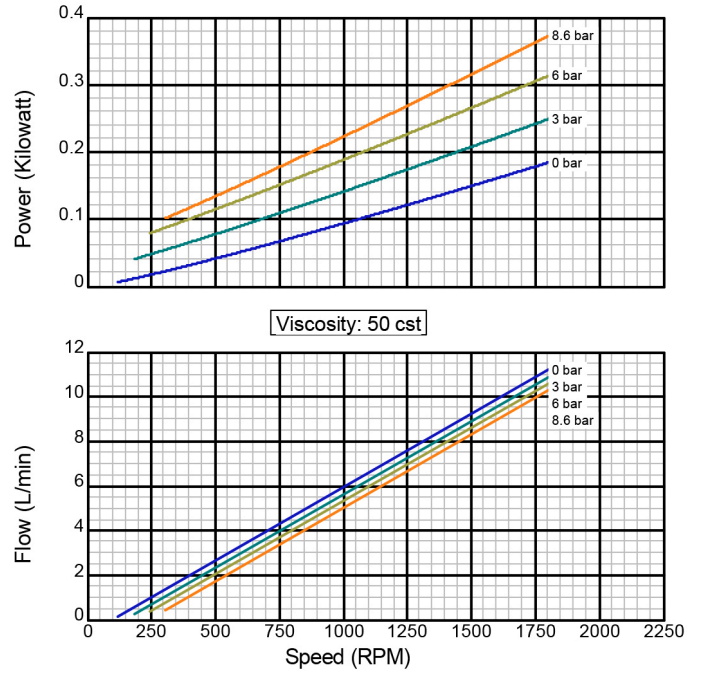


Model 1C

Iron Construction

Standard Clearance

9.525 mm Std. Port Size

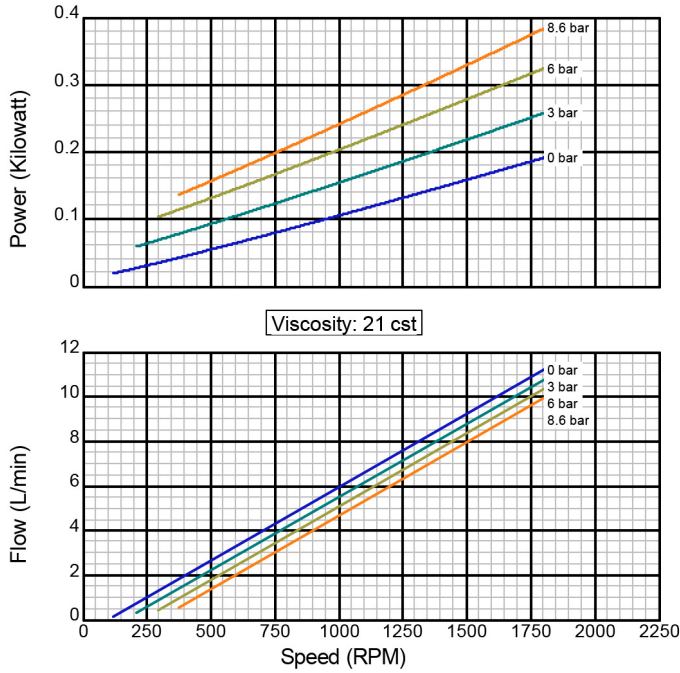

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 1C



Iron Construction

Standard Clearance


9.525 mm Std. Port Size

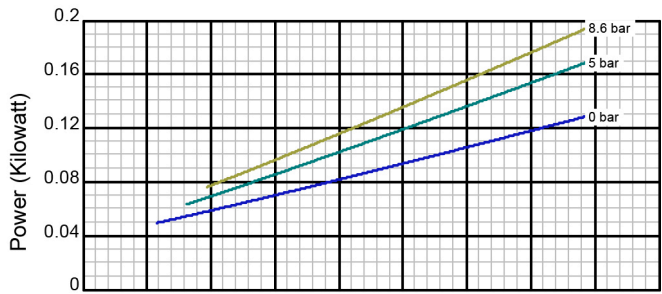

Viscosity: 1,000 cst

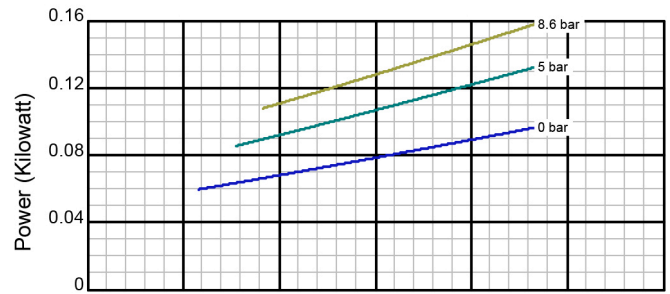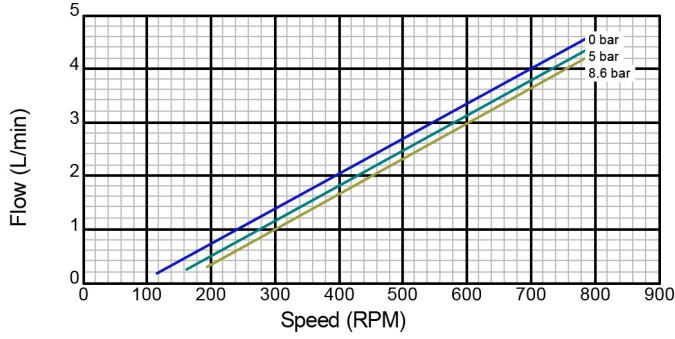

Viscosity: 2,000 cst

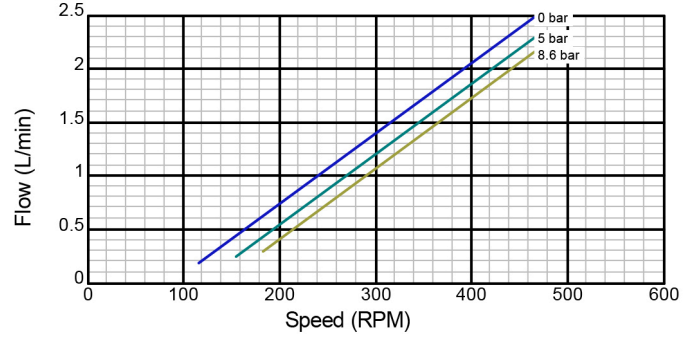

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

Model 2C

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

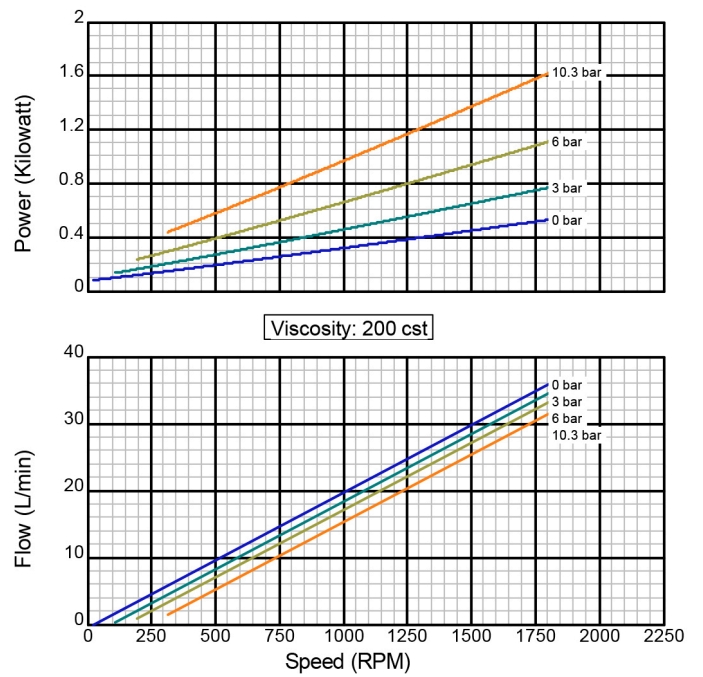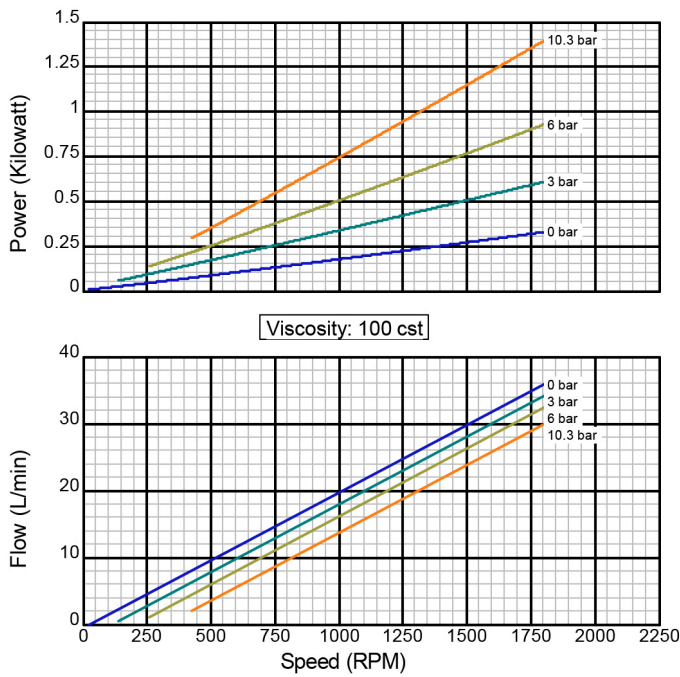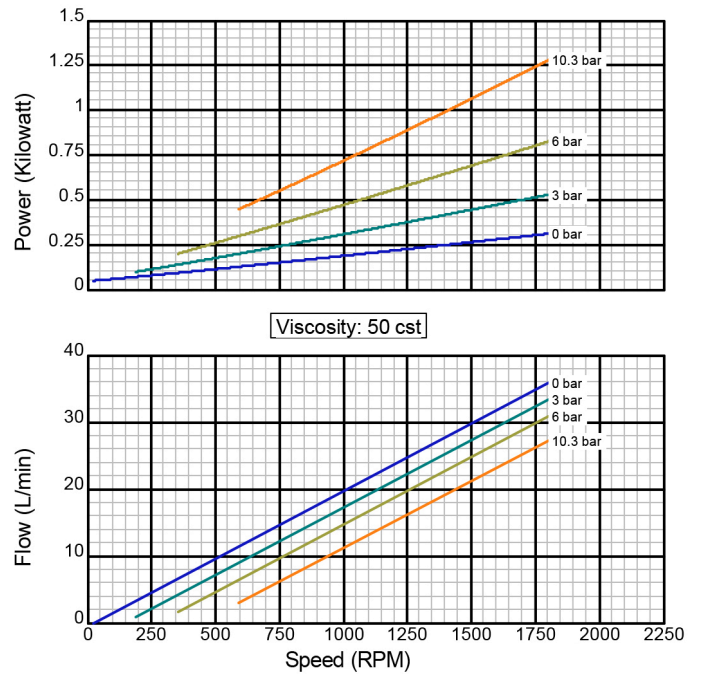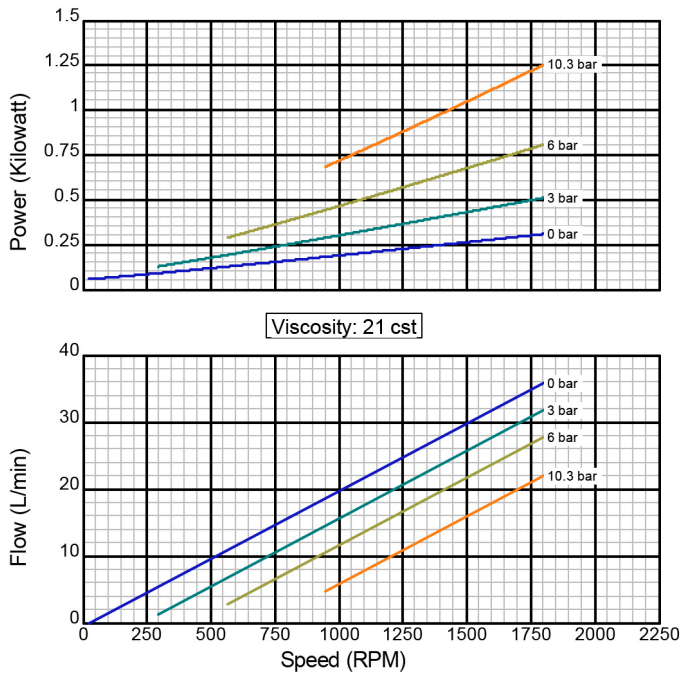

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.




Created on November 30, 2000

Model 2C

Iron Construction

Standard Clearance

25.4 mm Std. Port Size

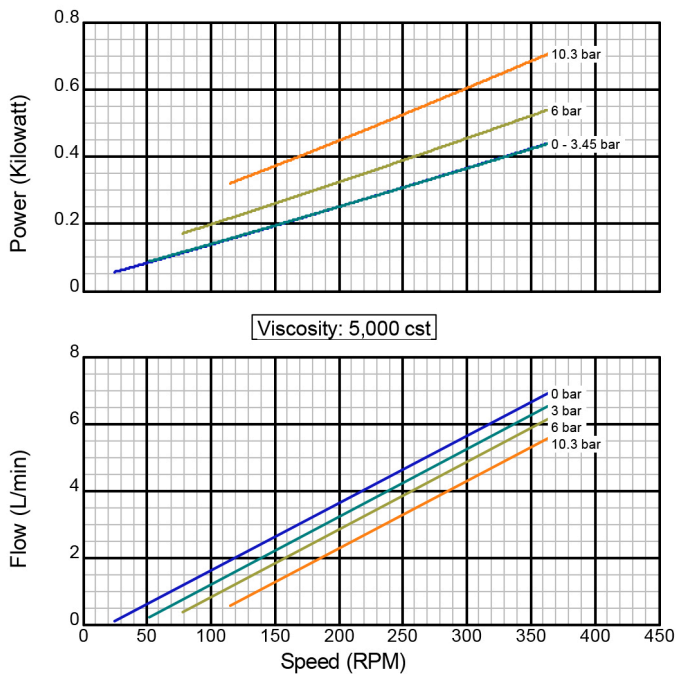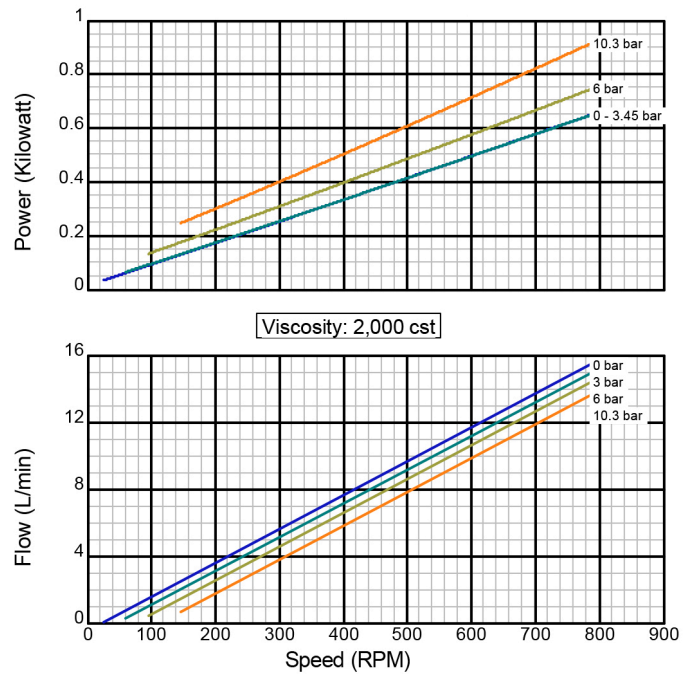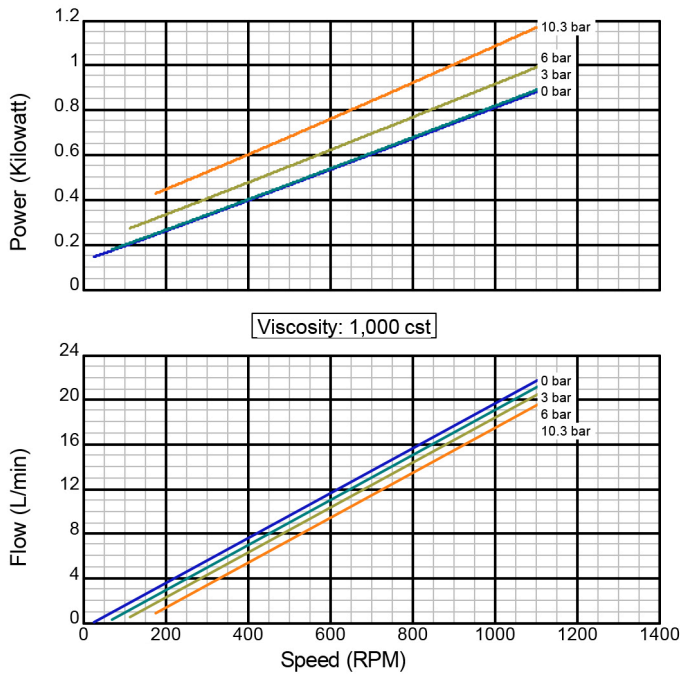

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.





Created on November 30, 2000

Model 3C

Iron Construction

Standard Clearance

31.75 mm Std. Port Size

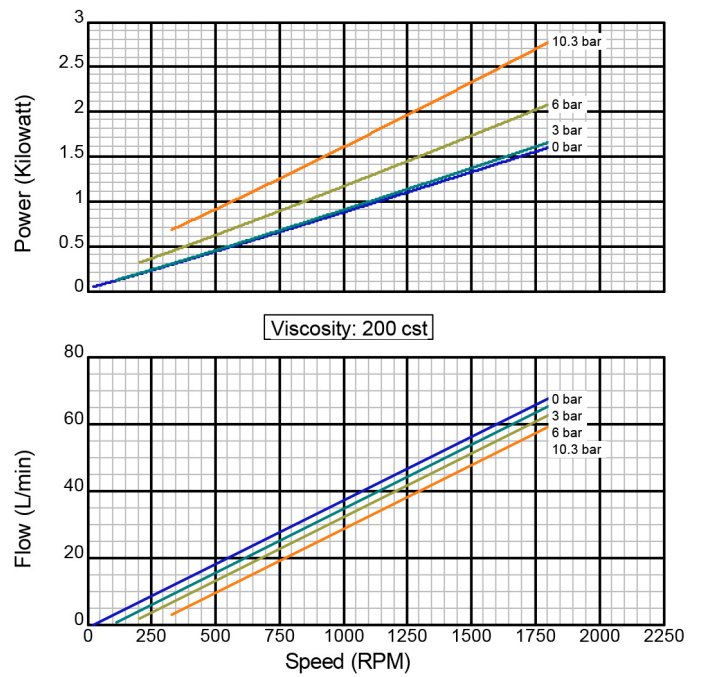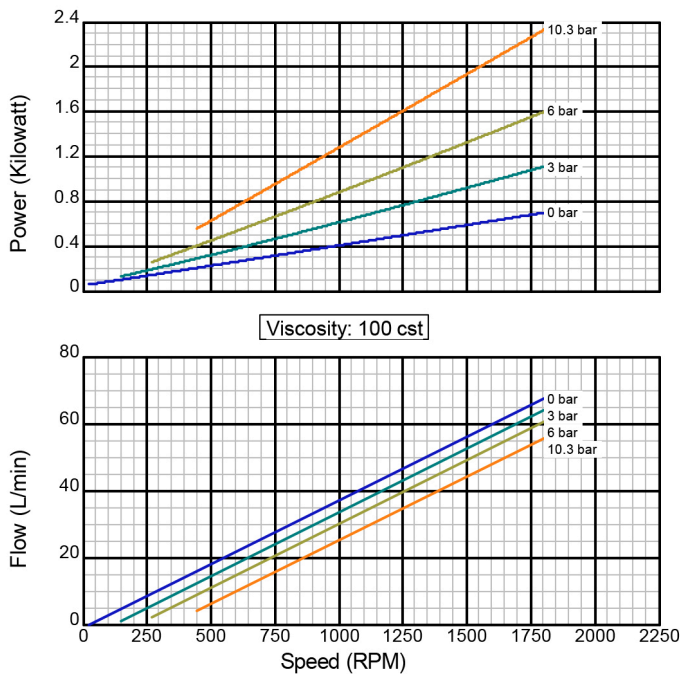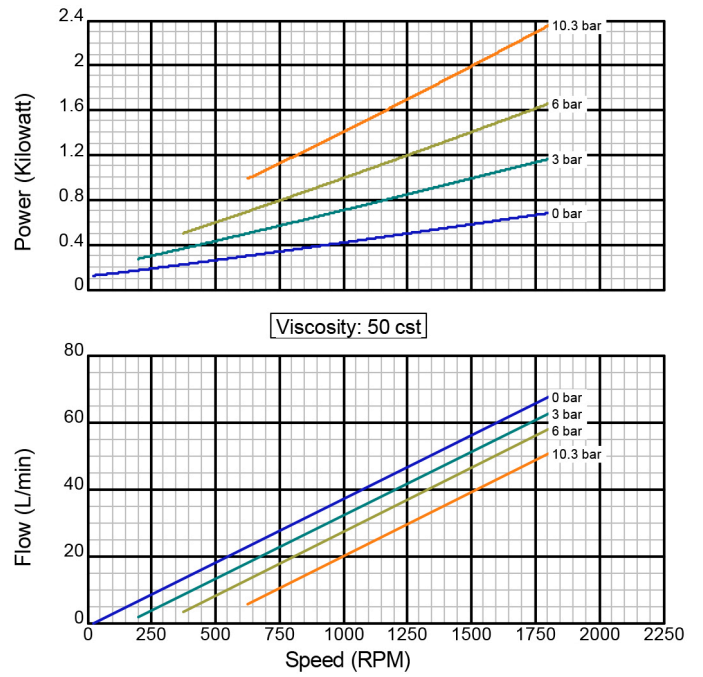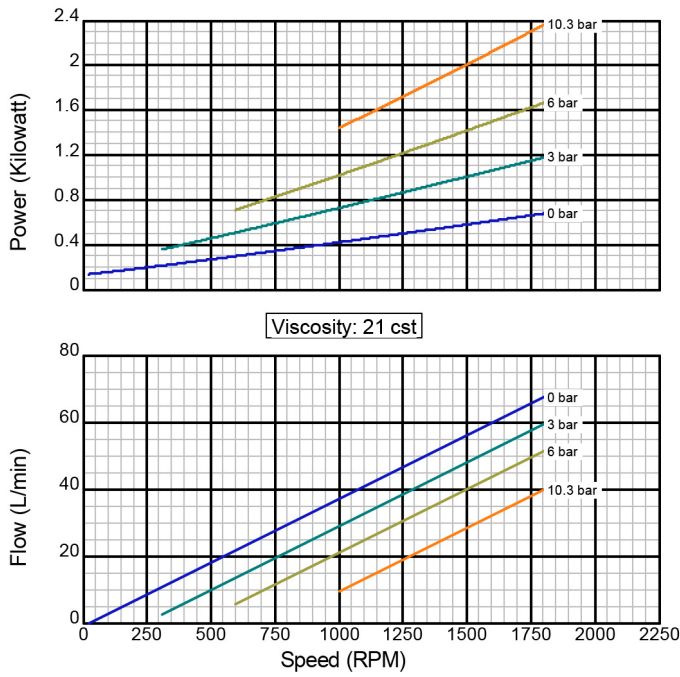

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 3C



Iron Construction

Standard Clearance



31.75 mm Std. Port Size

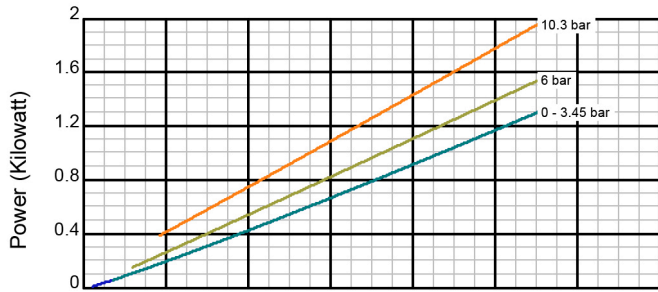


Viscosity: 1,000 cst

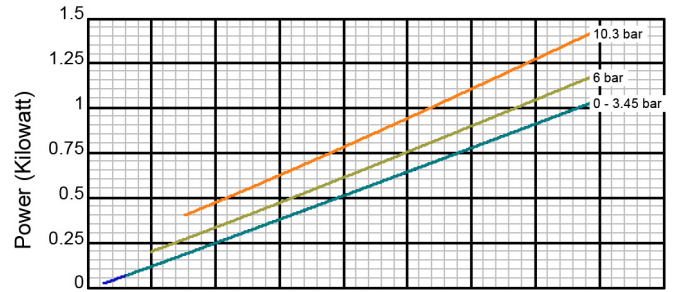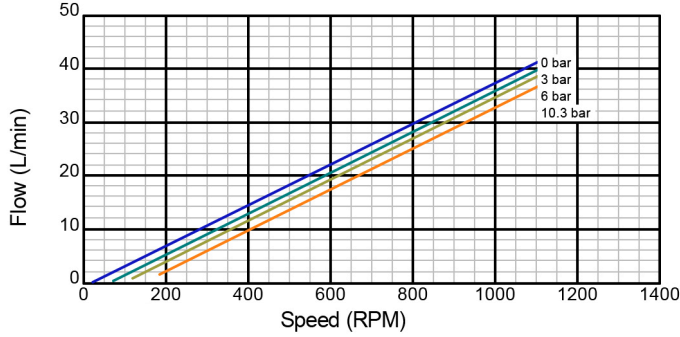

Viscosity: 2,000 cst

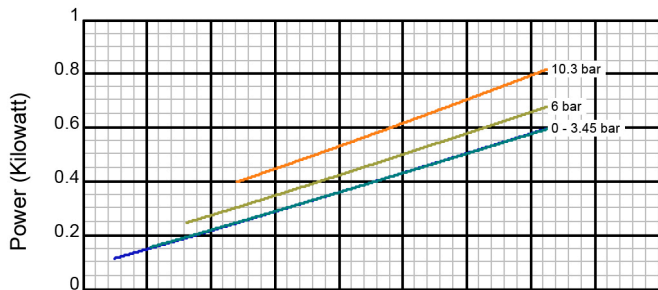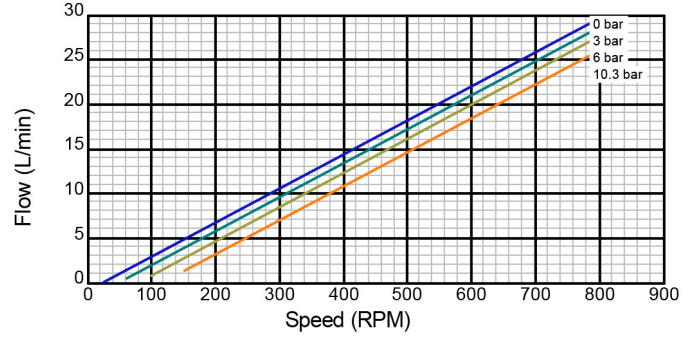

Viscosity: 5,000 cst

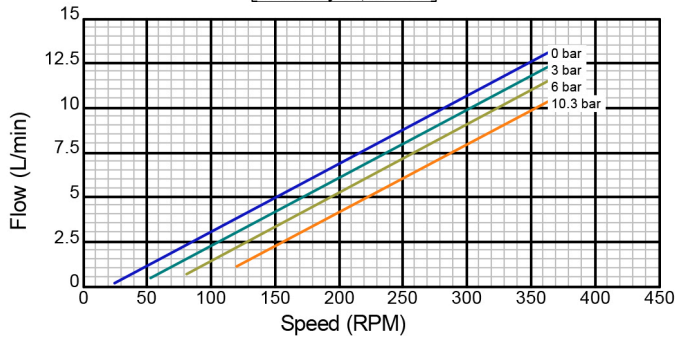

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 4C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

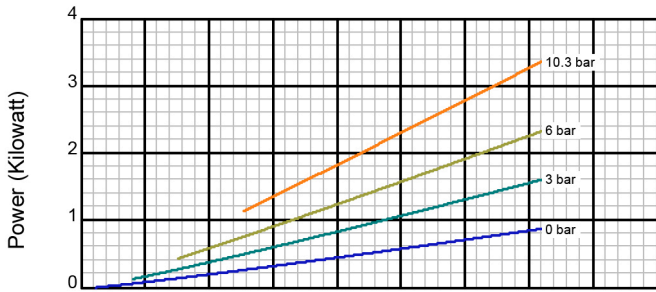



Viscosity: 21 cst

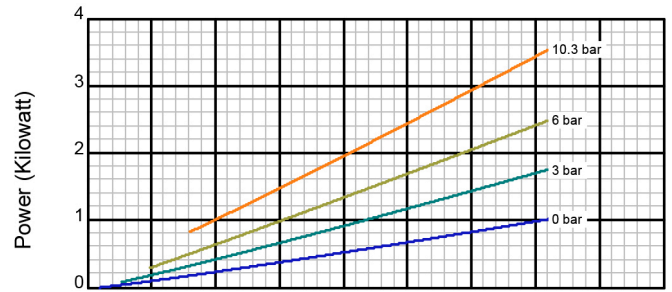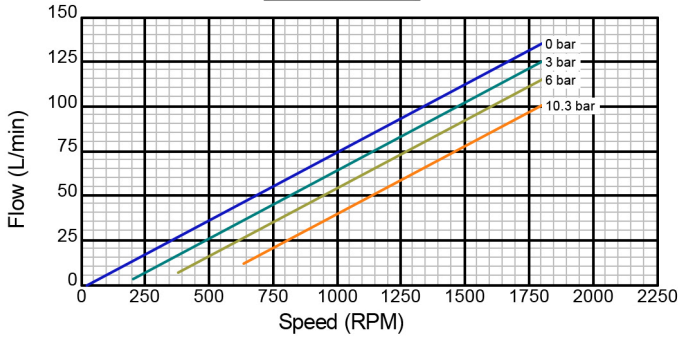


Viscosity: 50 cst

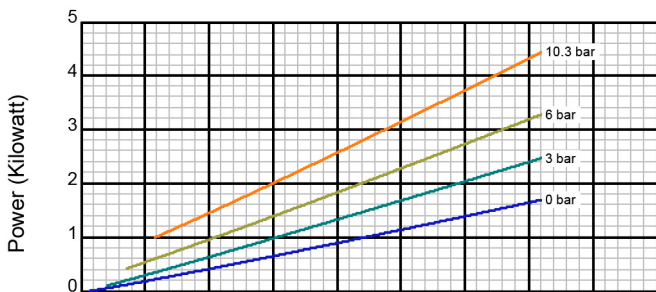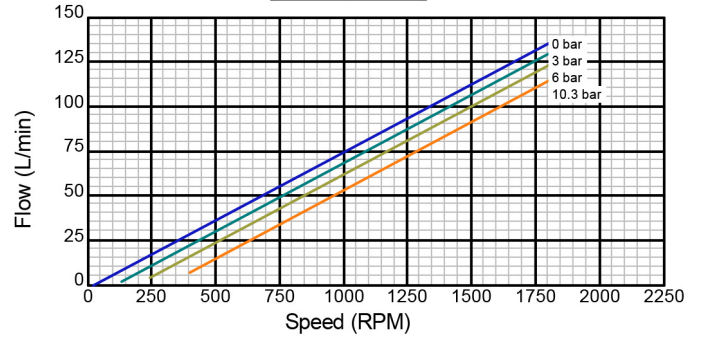

Viscosity: 100 cst

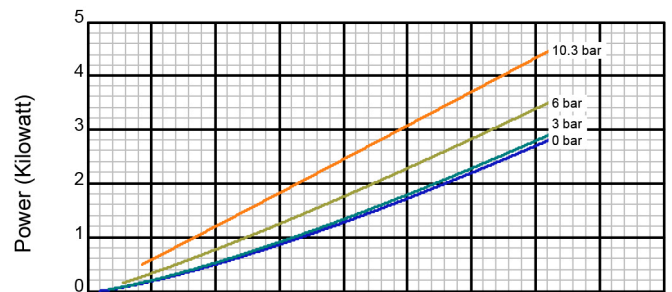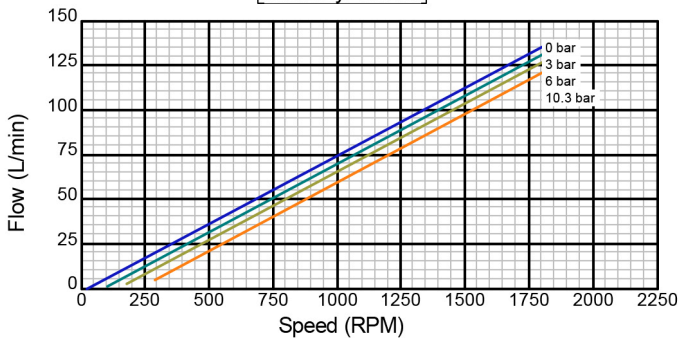

Viscosity: 200 cst

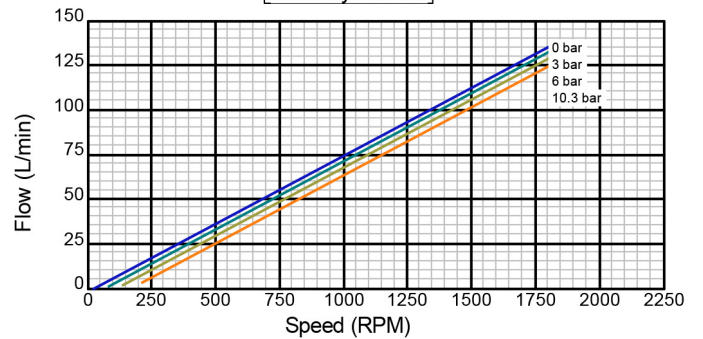

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 4C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

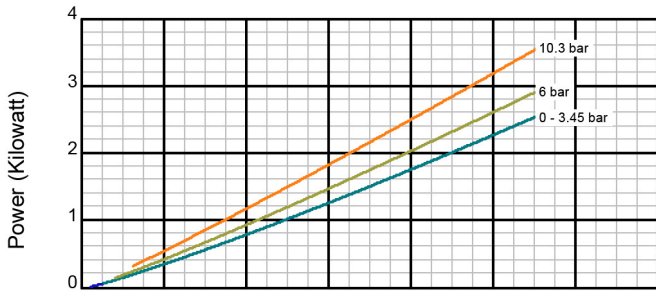


Viscosity: 1,000 cst

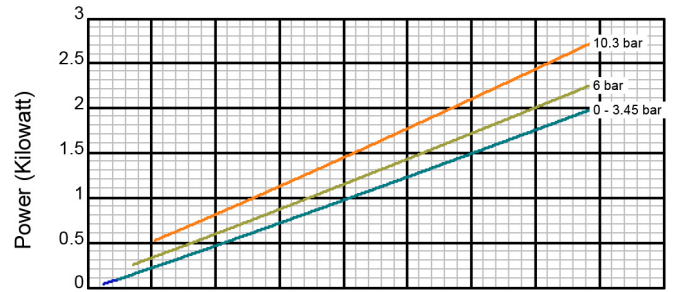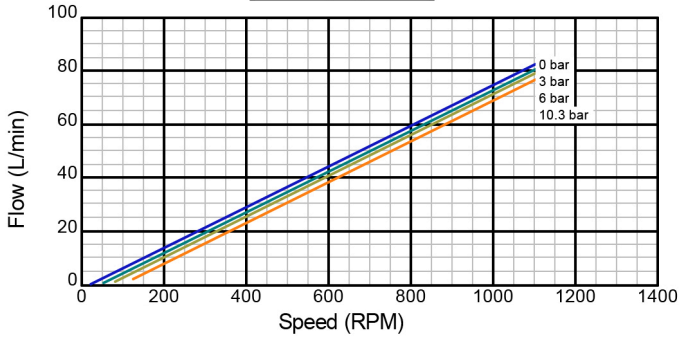

Viscosity: 2,000 cst

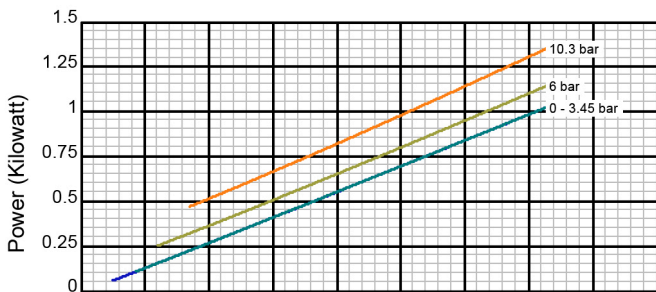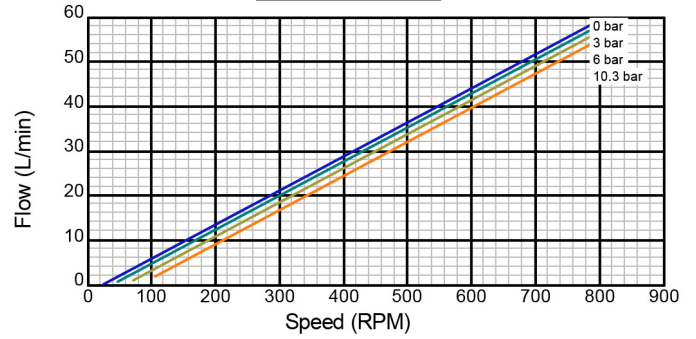

Viscosity: 5,000 cst

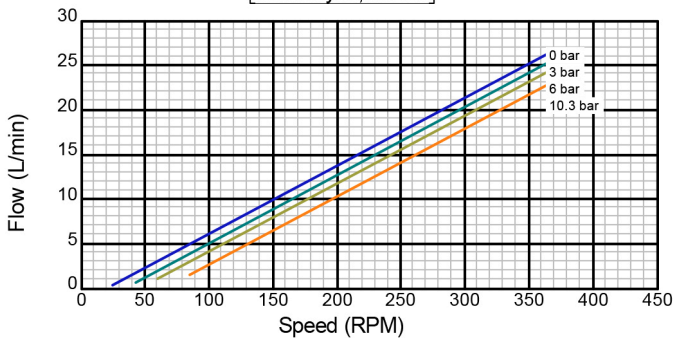

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 5C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

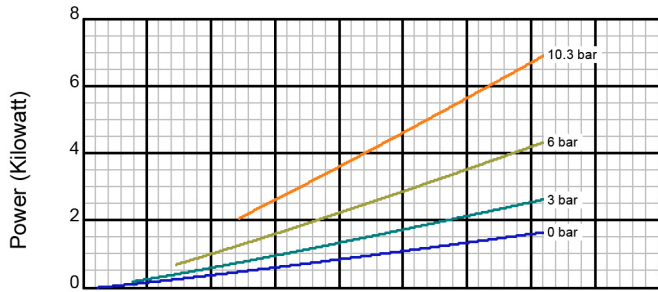



Viscosity: 21 cst

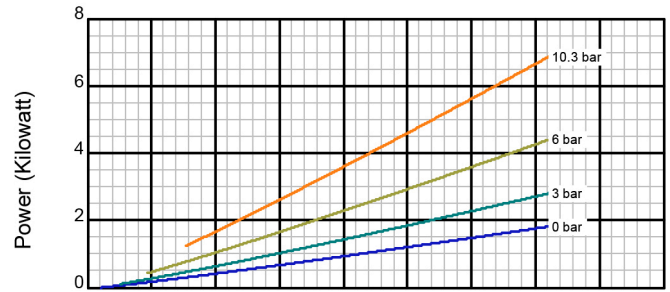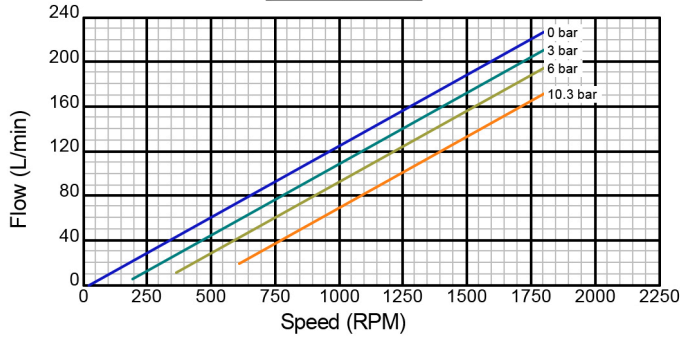


Viscosity: 50 cst

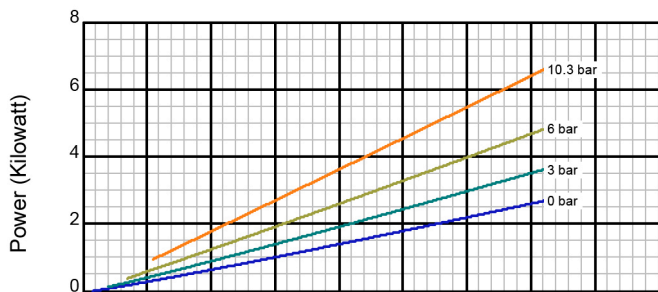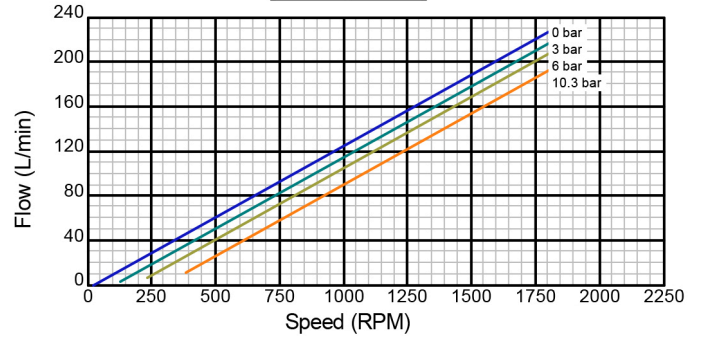

Viscosity: 100 cst

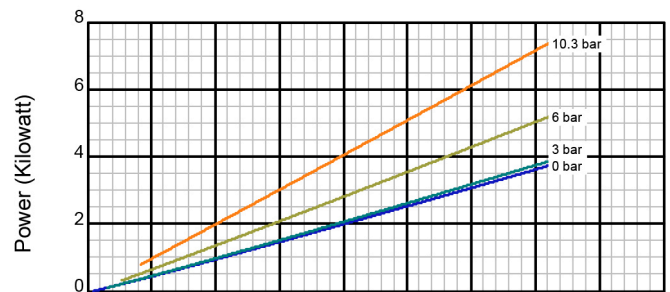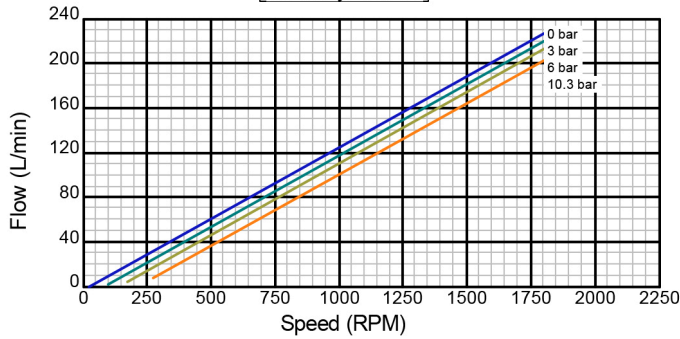

Viscosity: 200 cst

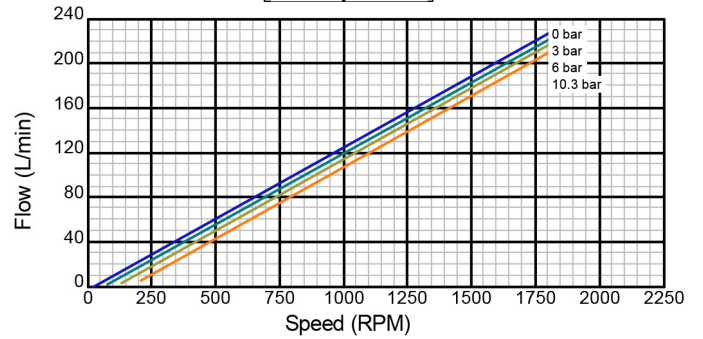

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 5C



Iron Construction

Standard Clearance



38.1 mm Std. Port Size

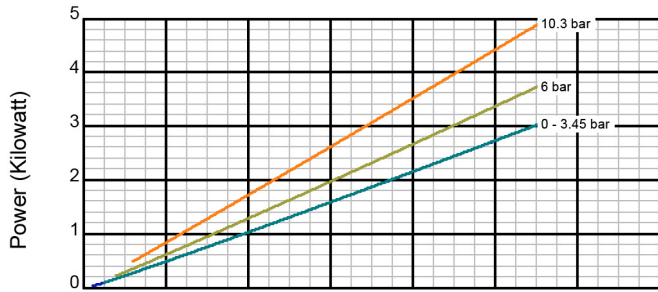


Viscosity: 1,000 cst

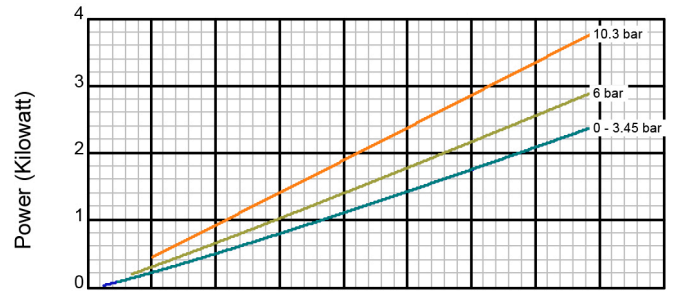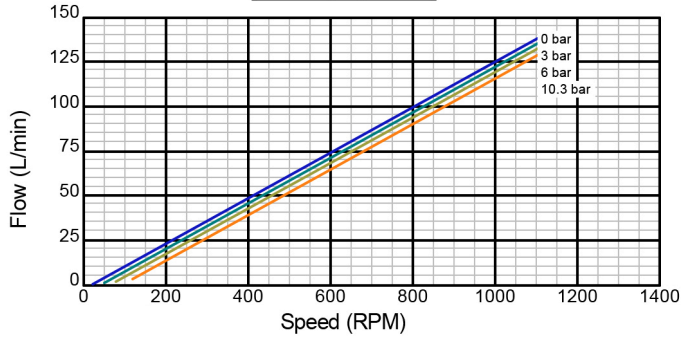

Viscosity: 2,000 cst

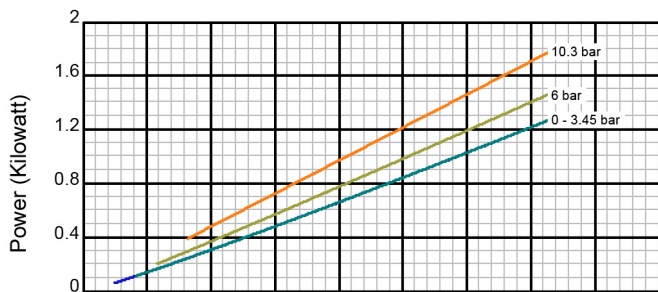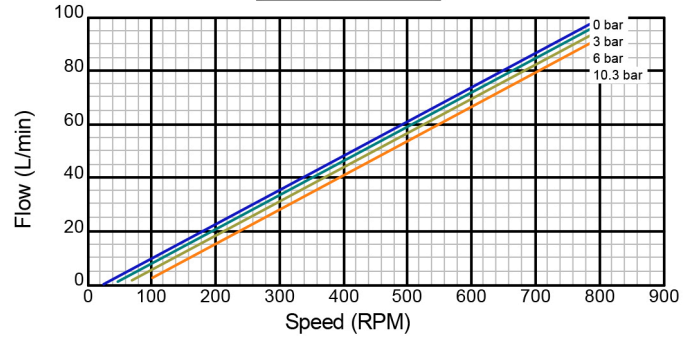

Viscosity: 5,000 cst

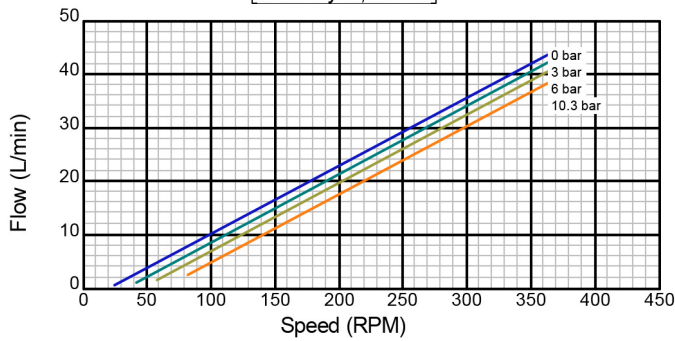

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 6C



Iron Construction

Standard Clearance



50.8 mm Std. Port Size

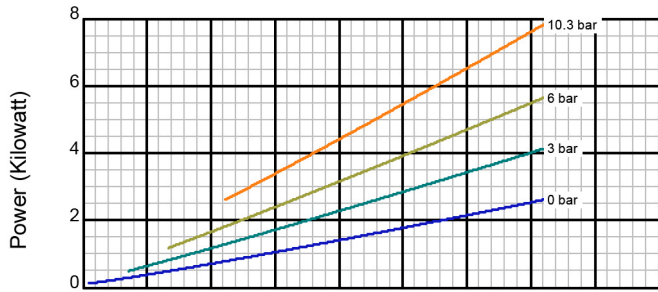



Viscosity: 21 cst

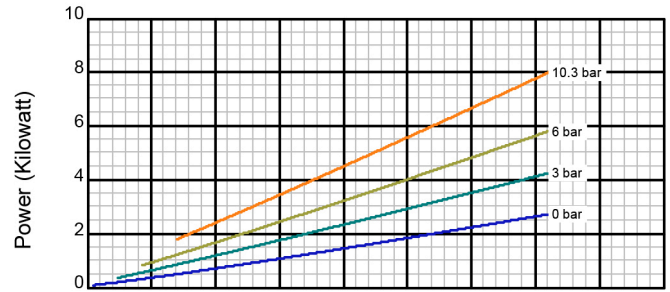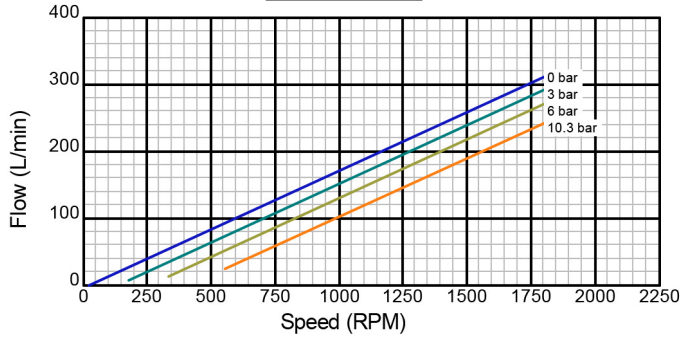


Viscosity: 50 cst

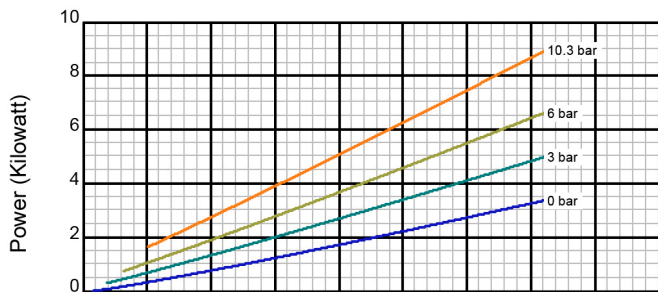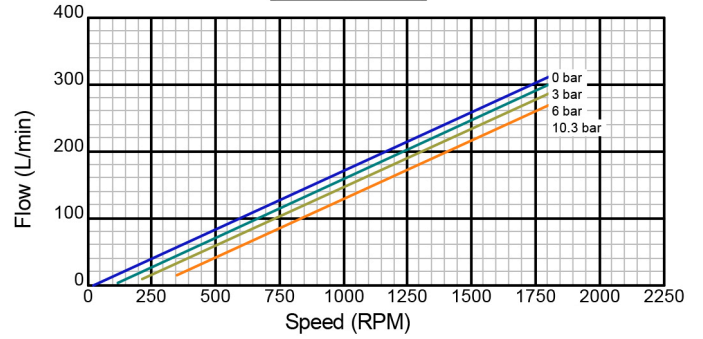

Viscosity: 100 cst

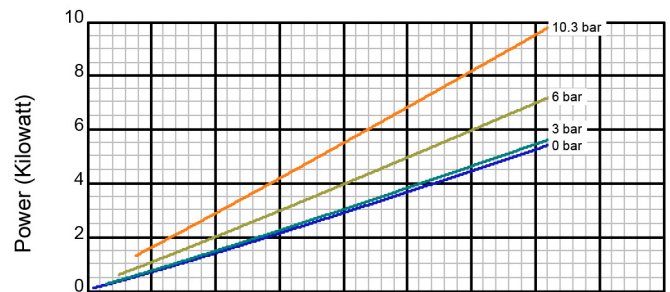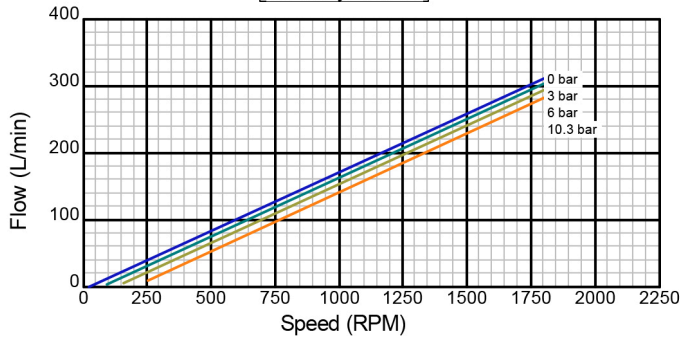

Viscosity: 200 cst

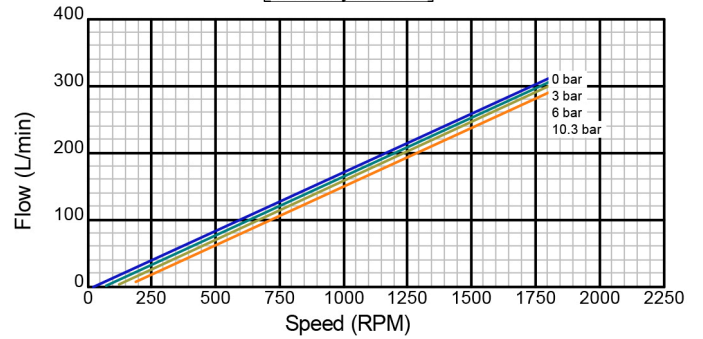

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.


Created on November 30, 2000

Model 6C



Iron Construction

Standard Clearance



50.8 mm Std. Port Size

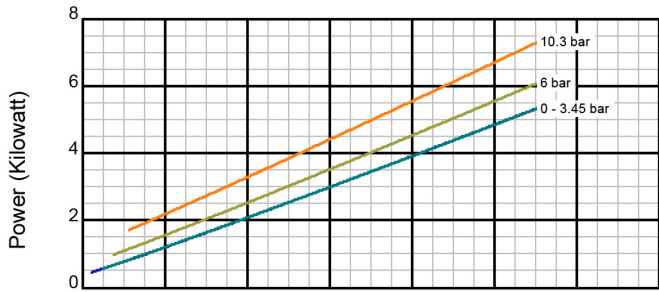


Viscosity: 1,000 cst

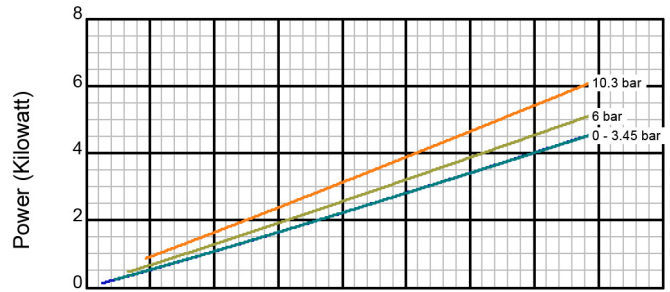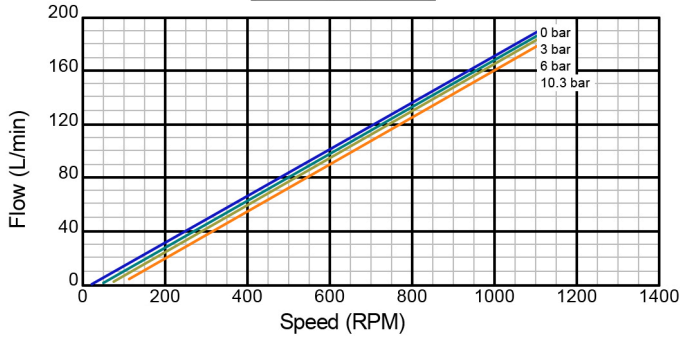

Viscosity: 2,000 cst

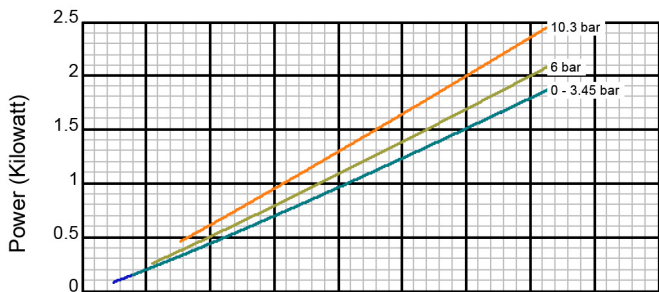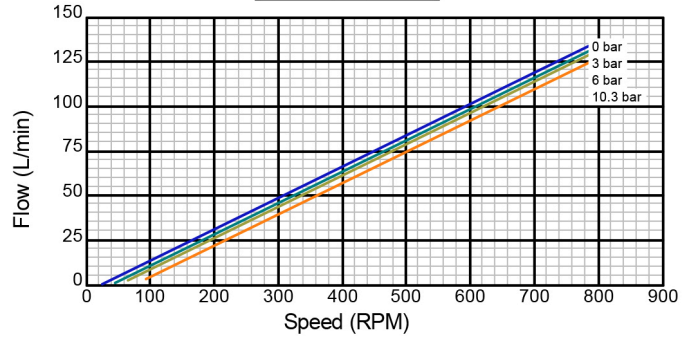

Viscosity: 5,000 cst

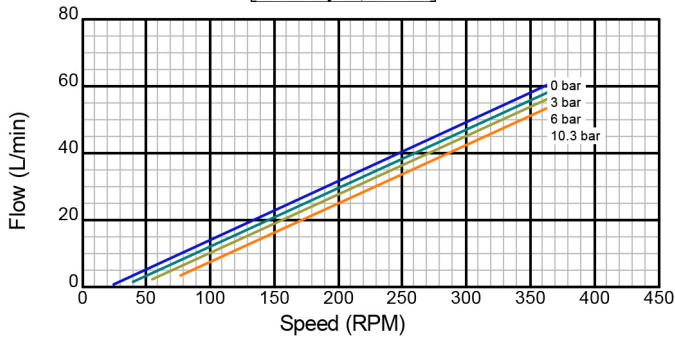

There are many additional factors to consider when selecting a pump, including (but not limited to) suction conditions, temperature limitations and material compatibilities. Curve data is typical only, actual performance may vary. Consult the factory or an authorized Tuthill Pump Group representative for assistance.

Created on November 30, 2000

Tuthill Pump Group

12500 S. Pulaski Road, Alsip, IL 60803

www.tuthillpump.com

Excellence at work. Excellence in life.