


## STENNER

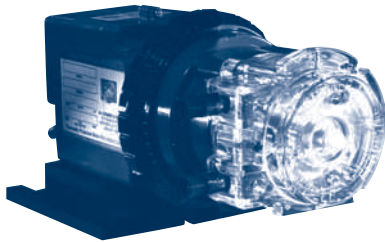

170 gpd, 100 psi

## UP TO 170 GPD, 100 PSI, AC AND DC

The Stenner line of peristaltic metering pumps offer dependable self-priming fluid metering or dispensing that will not lose its prime or clog from dirt or minor debris. In fact it will handle up to 50% slurry mixtures one or two individually adjustable heads can be mounted on a single drive. Models vary in rpm, hose size and voltage. Motors are 1/30 hp and are available in 120 and 220 vac 50/60 hz, 230V 50 hz and 12 vdc.

Series Number	Number of Heads	Min GPD	Max GPD	RPM
45 Series	1	.2	50	26
85 Series	1	.3	85	44
100 Series	2	.3	100	26
170 Series	2	.5	170	44

CONTENTS

INDEX

NEXT

BACK

HOME

## MEC-O-MATIC



Dolphin and 2400T Series

## UP TO 97 GPD, 25 PSI, SWIMMING POOL/GREASE TRAP

The "Dolphin Series" peristaltic pumps are widely used in the swimming pool and spa industry and are ETL listed. This series is built to industrial standards with lifetime lubricated heavy-duty shaded pole gear motors, self-lubricating chemical resistant roller assemblies and quick release acid-resistant head, making it a cost effective alternative for chemical and slurry solutions. The 2400T series has been engineered as the chemical metering pump for grease traps.

Series and Model	Max PSI	Max GPD	Description
Dolphin Model #10	25	13 (34CC/Minute)	Chemical/Slurry pump series
Dolphin Model #50	25	60 (158 CC/Minute)	Chemical/Slurry pump series
Dolphin Model #75	25	97 (255 CC/Minute)	Chemical/Slurry pump series
2400T	25	2.5 Gallons per Day	Grease Trap series – Mechanical Timer
2400T Plus	25	2.5 Gallons per Day	Grease Trap series – Electronic Timer
2400T-DC	25	3.0 oz per Minute	Grease Trap series – Battery operated

## GRI



Compact (up to 350 ml/min)

## 38-350 ML/MIN, 20' SUCTION, COMPACT, AC AND DC

This peristaltic pump series is a compact design often used in OEM pieces of equipment for dispensing or transferring slurries, abrasives, viscous liquids and corrosive liquids. The tubing is Norprene and capable of handling temperatures of up to 275°F and suction lifts of up to 20 feet. 230V versions available.

Model Number	Motor Specifications					Flow Rate 50Hz ml/min	Flow Rate 60Hz ml/min
	RPM	Volts	Hz	Shell	Base		
30500-000	60	115	50/60	Open	Yes	146	175
30500-002	120	115	50/60	Open	Yes	292	350
30500-004	60	115	50/60	Open	Yes	38	45
30500-138	120	12vdc	-	Open	Yes	350	350

## RF 100 SERIES



Mini (up to 500 ml/min)

## 10 TO 500 ML/MIN, SELF-PRIMING MINI PUMP, AC AND DC

The RF 100 series features three different pump flow configurations capable of transferring 10 to 500 ml/min. Pumps can be powered directly by DC current or are available with a constant (6 vdc) or variable speed (0-12 vdc) 115 vac input power supply. Pumps are compact, weigh in at only 16 ounces, and come equipped with 3/16" hose fittings.

Model Number	Ml/Min With Various Hose Sizes		
	3/16" ID x 5/16" OD	1/8" ID x 1/4" OD	1/16" ID x 3/16" OD
RF 100 with variable speed control	50 to 70	35 to 220	10 to 45
RF 100 with single speed power supply	200	75	24
RF 100 with 12 vdc or 24 vdc motor	500	220	75