



# JABSCO DRUM PUMPS

## JABSCO

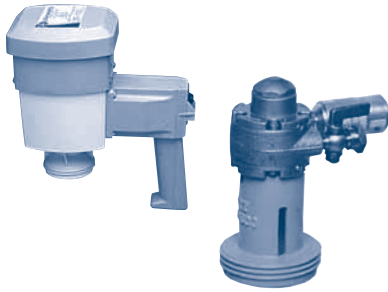

Electric and Pneumatic Motors

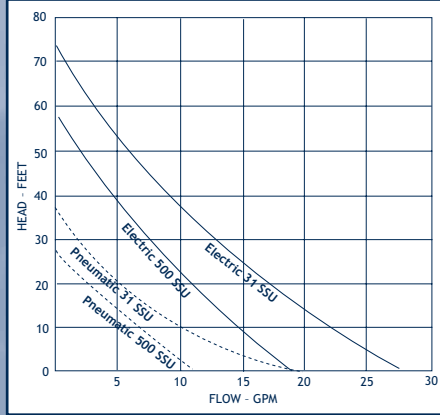

## JABSCO DRUM PUMP MOTORS

Jabsco's electric and air driven motors will handle viscosities up to 3500SSU when mated with any of Jabsco's pump tubes.

Model	Description
16450 Series	115 vac, 60 hz (16450-0115), or 230 vac 50 hz (16450-0220), one phase motor with manual reset circuit breaker, easy to use rocker switch, and 16 feet of oil resistant cord.
16440-0000	.36 HP, 8000 rpm air motor with 1/8" FPT air inlet. Maximum air required: 15 cfm at 80 psi.

CONTENTS

INDEX

NEXT

BACK

HOME

## JABSCO



Polypropylene

## 25 GPM POLYPROPYLENE DRUM PUMPS IN 27", 35 1/2", 40" AND 47"

These Polypropylene pump tubes will mount easily on any of the Jabsco electric or pneumatic motors listed above (also refer to their corresponding flow curve). Each pump is sealless allowing the fluid to only contact the Polypropylene housing, Polypropylene impeller and the carpenter 20 shaft. Not recommended for viscosities over 3500 SSU.

Model	Description	Options	Description
16400-3270	27" Polypropylene tube w/1" barbed discharge	18753-0080	Drum Adapter
16400-3350	35" Polypropylene tube w/1" barbed discharge	16490-1000	Polypropylene strainer (screws onto bottom)
16400-3400	40" Polypropylene tube w/1" barbed discharge	16470-0000	Wall mount storage bracket
16400-3470	47" Polypropylene tube w/1" barbed discharge	18753-0077	Adjustable on/off nozzle

## JABSCO



Kynar

## 25 GPM KYNAR DRUM PUMPS IN 27", 35 1/2", 40" AND 47"

These Kynar pump tubes will mount easily on any of the Jabsco electric or pneumatic motors listed above (also refer to their corresponding flow curve). Each pump is sealless allowing the fluid to only contact the Kynar housing, Kynar impeller and the Hastelloy® C shaft. Not recommended for viscosities over 3500 SSU.

Model	Description	Options	Description
16520-3270	27" Kynar tube with 1" barbed discharge	18753-0080	Drum Adapter
16520-3350	35" Kynar tube with 1" barbed discharge	16490-1001	Tefzel strainer (screws onto bottom of pump)
16520-3400	40" Kynar tube with 1" barbed discharge	16470-0000	Wall mount storage bracket
16520-3470	47" Kynar tube with 1" barbed discharge	18753-0077	Adjustable on/off nozzle

## JABSCO



316 Stainless

## 25 GPM, 316SS DRUM PUMPS IN 27", 35 1/2", 40" AND 47"

These 316 Stainless Steel pump tubes will mount easily on any of the Jabsco electric or pneumatic motors listed above (also refer to their corresponding flow curve). Each pump is sealless, allowing the fluid to only contact the 316 stainless steel housing, Tefzel impeller and fittings, and the 316 stainless steel shaft. Not recommended for viscosities over 3500 SSU.

Model	Description	Options	Description
16410-3270	27" 316 SS tube with 1" barbed discharge	18753-0080	Drum Adapter
16410-3350	35" 316 SS tube with 1" barbed discharge	16490-1001	Tefzel strainer (screws onto bottom of pump)
16410-3400	40" 316 SS tube with 1" barbed discharge	16470-0000	Wall mount storage bracket
16410-3470	47" 316 SS tube with 1" barbed discharge	18753-0077	Adjustable on/off nozzle
		16471-0000	Ground wire