

## SHURFLO



4" Submersible Well Pump

### 12 AND 24 VDC, UP TO 230 FOOT DEPTH FOR 4"+ WELLS

This submersible diaphragm pump is perfect for solar or battery powered water supply for remote homes or cabins, livestock, pond aeration, or irrigation. It delivers up to 112 gph and will operate up to a depth of 230 feet. It has a 1/2" hose barb discharge, 50 mesh stainless steel inlet screen, and will run dry without damage. Standard voltage is 24 vdc. The pump will operate on 12 vdc at reduced performance. Call for details.

<b>Model Number:</b>	9325-043-101 24 vdc					
Vertical Lift (In Feet)	20	60	100	140	180	230
Amp Draw	1.5	2.1	2.6	3.1	3.6	4.1
Solar Array (Min. Watts)	58	78	99	115	135	155

CONTENTS

INDEX

NEXT

BACK

HOME

## WELL TEST (12 and 24 vdc)




2" Submersible Well Pump

### 12 AND 24 VDC FOR 2" WELLS, UP TO 150 FOOT DEPTH!

This family of submersible DC pumps will fit easily down a 2" diameter well. Three pumps can be arranged with the "IM" series to obtain up to 75 feet of head and four WGI VX101 pumps can be mounted in-line to achieve 150 feet of head. These pumps are used for solar and battery powered water well delivery and test.

Model Number	Volts DC	Amps	Max GPM	Max Head	Impeller Material	Port Configuration
WGI VX101	12	10	5	50	Stainless Steel	Screened or in-line ports, 1/2" OD Outlet
IM GP8815	12	2.3	2.6	27"	ABS Plastic	Screened Inlet, 1/2" or 3/8" OD Outlet
IM GP8825	24	1.2	2.6	27"	ABS Plastic	Screened Inlet, 1/2" or 3/8" OD Outlet
IM GP9955	12	2.3	2.6	27"	ABS Plastic	In-line Ports, 1/2" or 3/8" OD
IM GP9965	24	1.2	2.6	27"	ABS Plastic	In-line Ports, 1/2" or 3/8" OD
IM GP9216B	12	6.2	3.3	42"	ABS Plastic	Screened Inlet, 1/2" or 3/8" OD Outlet

## GRI (12 vdc)




Peristaltic Test Pump

### 12 VDC PERISTALTIC TEST PUMP, 20 FOOT LIFT

This economical peristaltic pump will lift 20 feet and pump up to 350 ml/min. Its low amp draw, compact design (3 1/2"H x 5 1/4"L x 3 1/8"W), and 2 pound weight makes it ideal for ATV mounting as well as a valuable accessory to any tool chest for water or shallow well testing. Larger peristaltic pumps are displayed on page 40-42.

Model Number	Volts DC	Amps	Weight in lbs.	Suction Lift	Max Flow ml/min	Dimensions (H x L x W)
GRI 30500-138	12 vdc	1/2	2	20 feet	350	3 1/2" x 5 1/4" x 3 1/8"

## GORMAN-RUPP

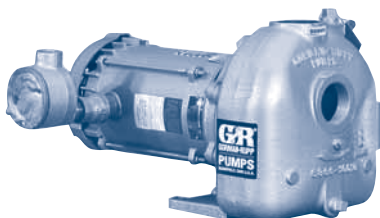

Remediation

### SELF-PRIMING EXPLOSION PROOF SERIES, UP TO 128 GPH, 72 TDH

This Gorman-Rupp self-priming explosion proof pump series is designed for use in hazardous environments and/or for handling flammable liquids. Three port sizes (1 1/4", 1 1/2" and 2" ports) are available in single and three phase, 1/2 to 2 horsepower. All models are self-priming to 20 feet, equipped with Viton® seals with carbon and Ni-Resist faces and capable of handling liquids with temperatures to 160°F.

Model Number	HP	Port Size	GPM at Feet of Head					Max Head
			5'	10'	20'	30'	40'	
AM 81 1/4A3-X.50	1/2	1 1/4"	56	52	40	23	-	36'
AM 81 1/2D3-X1	1	1 1/2"	74	72	65	54	40	54'
AM 81 1/2E3-X1.5	1 1/2	1 1/2"	91	90	86	78	69	74'
AM 02C3-X1.5	1 1/2	2"	110	98	92	78	61	56'
AM 02D3-X2	2	2"	130	130	120	107	91	57'