


**DUAL STATION INSTALLATION KIT 43670-0007
60020-0000 SEARCHLIGHT**

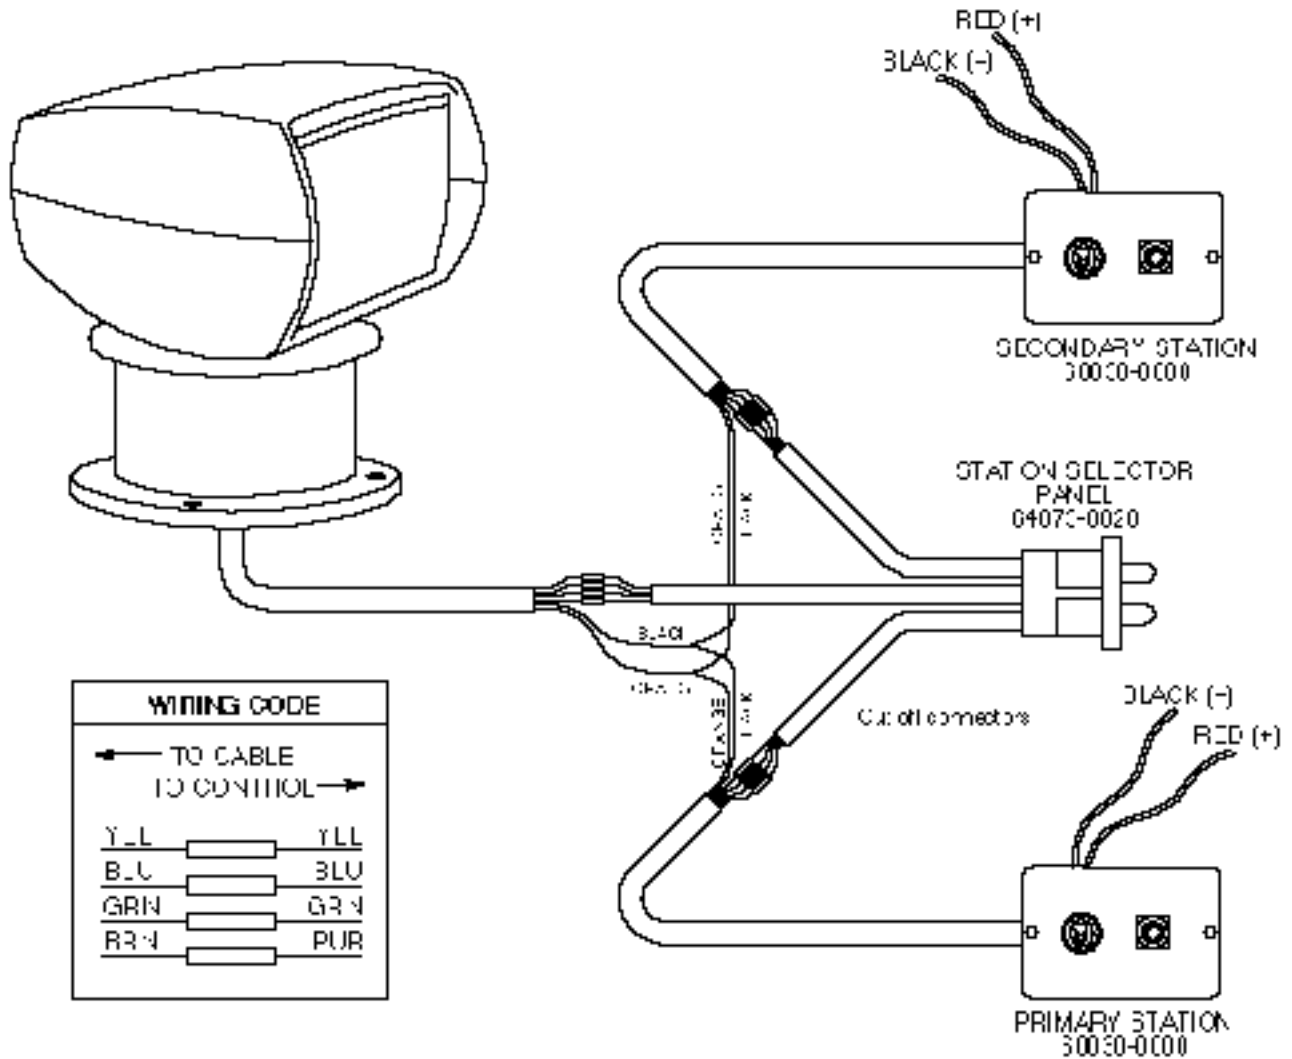

NOTE: EXTRA CABLE MAY BE REQUIRED. Use std. RCL cable and cut off connector. Gray wire in extra cable is not used.

1. Install searchlight and primary control per product data sheet.
2. Install station selector panel (64073-0020) near (1 foot radius) primary control (flybridge or lower station).
3. Route secondary control cable from station selector panel to secondary control location (cable acquired separately).
4. Install secondary control per instructions for primary control.
5. Cut off both plugs on station selector panel (64073-0020) and strip wire ends.
6. Wiring Connections:
Connect positive (+) power lead to red (+) wire and negative (-) power lead to the black (-) wire on the primary control. Repeat with separate power leads to secondary control. Connect orange and black wires from cable to orange and black wires from both the primary and secondary control. Connect the remaining wires per wiring code and wiring diagram above.
7. Use bedding compound or sealant to waterproof controls when installing.
8. Secure controls with self-tapping screws provided.