


| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|----|----|----|----|----|---|---|---|---|
| 2-1/16 | 1-3/4 | 4 | 54 | 10 | 68 | 55 | 59 | 4 | 1 | — | — |



| | | | |
|-----------------------|-------|---------------------|------------|
| | STD | APPROX STALL TORQUE | 205 FT-LBF |
| STATOR MAJOR DIAMETER | 1.479 | ROTOR ECCENTRICITY | .107 |
| STATOR MINOR DIAMETER | 1.051 | ROTOR WEIGHT | 18 LBS. |
| ROTOR MAJOR DIAMETER | 1.285 | STATOR WEIGHT | 20 LBS. |

PERFORMANCE DATA

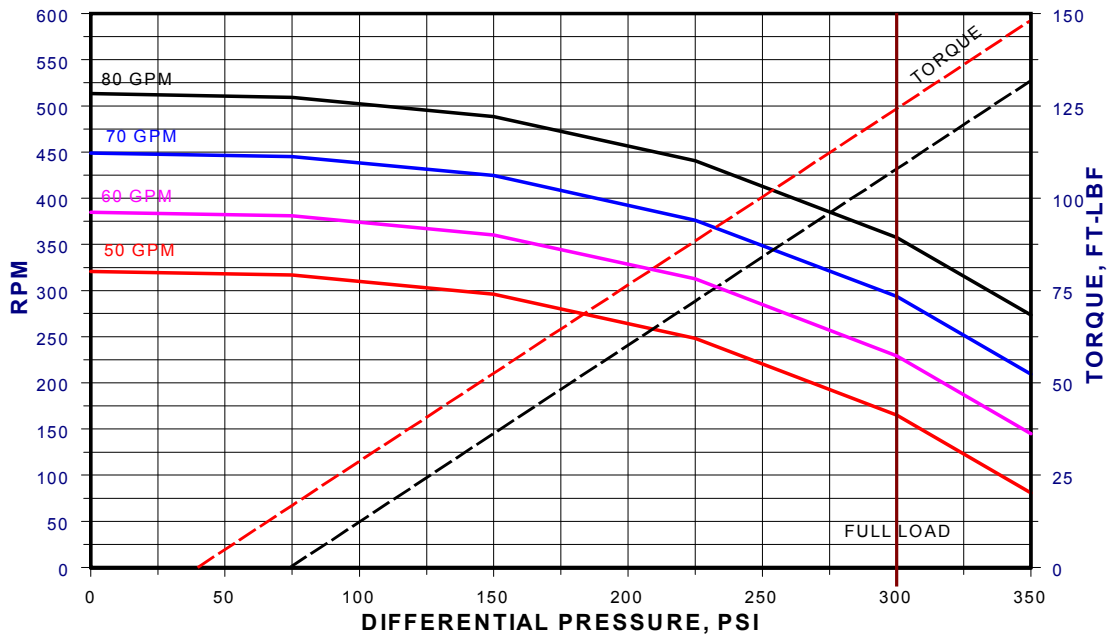

206A4520




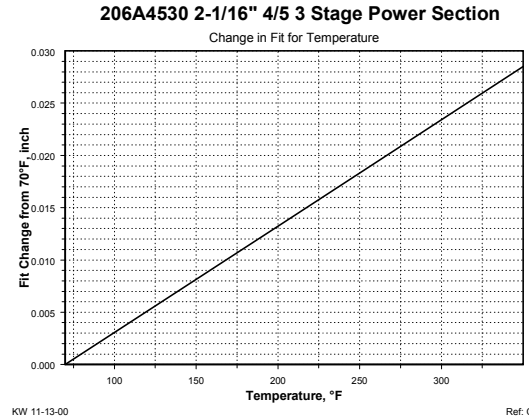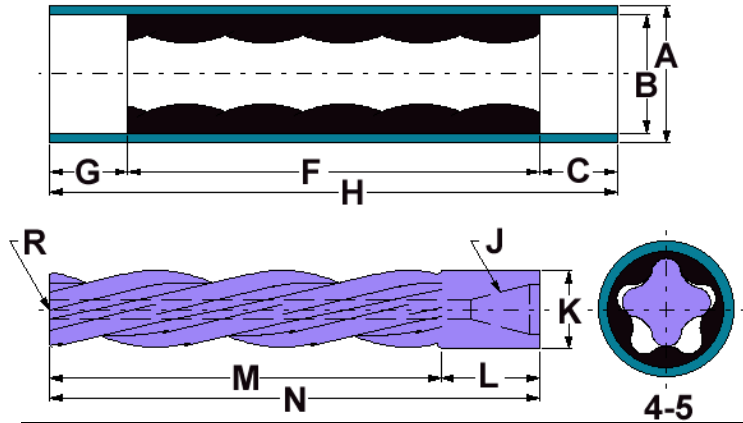

| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|----|----|----|----|----|---|---|---|---|
| 2-1/16 | 1-3/4 | 4 | 81 | 10 | 95 | 82 | 86 | 4 | 1 | — | — |



| | | | | |
|-----------------------|-------|-------|---------------------|------------|
| | STD | OVS | APPROX STALL TORQUE | 310 FT-LBF |
| STATOR MAJOR DIAMETER | 1.494 | 1.514 | ROTOR ECCENTRICITY | .107 |
| STATOR MINOR DIAMETER | 1.066 | 1.086 | ROTOR WEIGHT | 28 LBS. |
| ROTOR MAJOR DIAMETER | 1.285 | | STATOR WEIGHT | 28 LBS. |

PERFORMANCE DATA

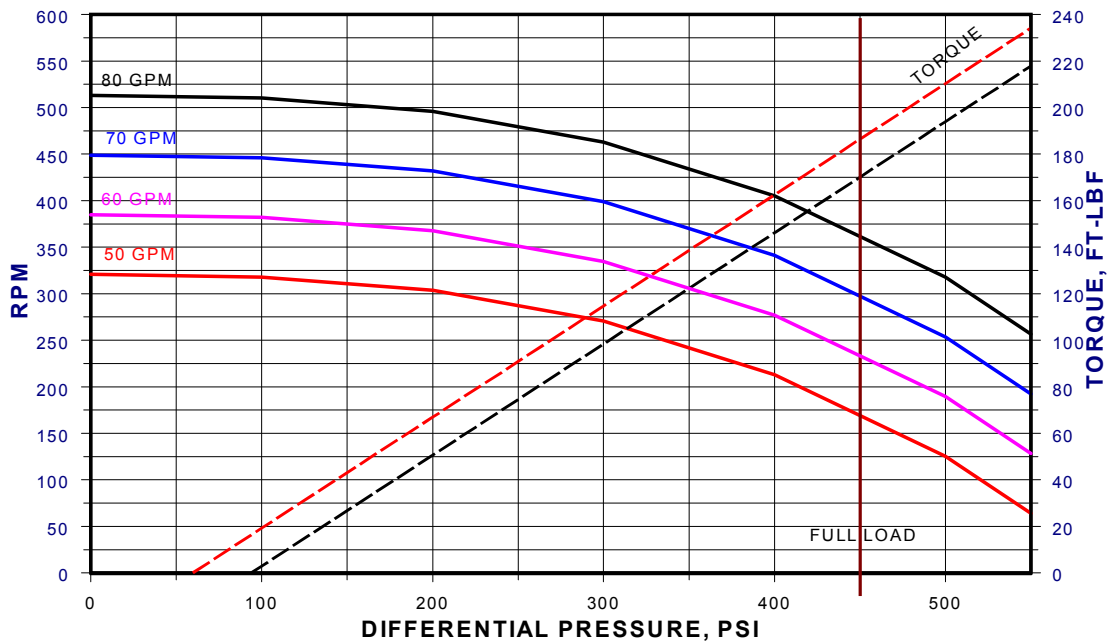


206A4530



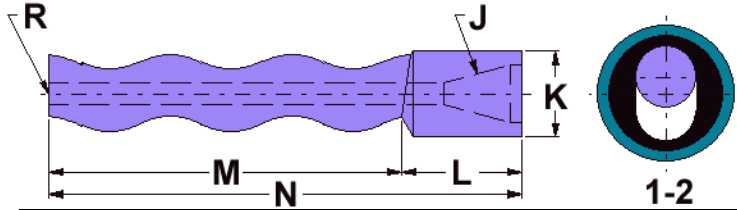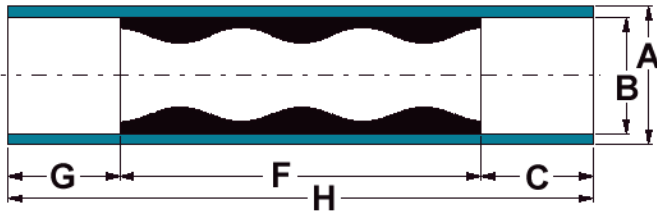

206R1220 Roper 2-1/16" 1/2 2 Stage Power Section
Change in Fit for Temperature

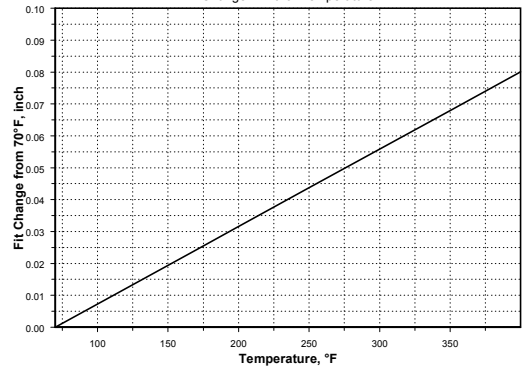

KW 11-10-00


G92-478

| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|----|----|----|----|----|---|---|---|---|
| 2-1/16 | 1-3/4 | 4 | 50 | 10 | 64 | 51 | 55 | 4 | 1 | — | — |

STD
 STATOR MAJOR DIAMETER 1.224
 STATOR MINOR DIAMETER 0.616
 ROTOR MAJOR DIAMETER 0.940



APPROX STALL TORQUE 60 FT-LBF
 ROTOR ECCENTRICITY .152
 ROTOR WEIGHT 10 LBS.
 STATOR WEIGHT 21 LBS.

PERFORMANCE DATA

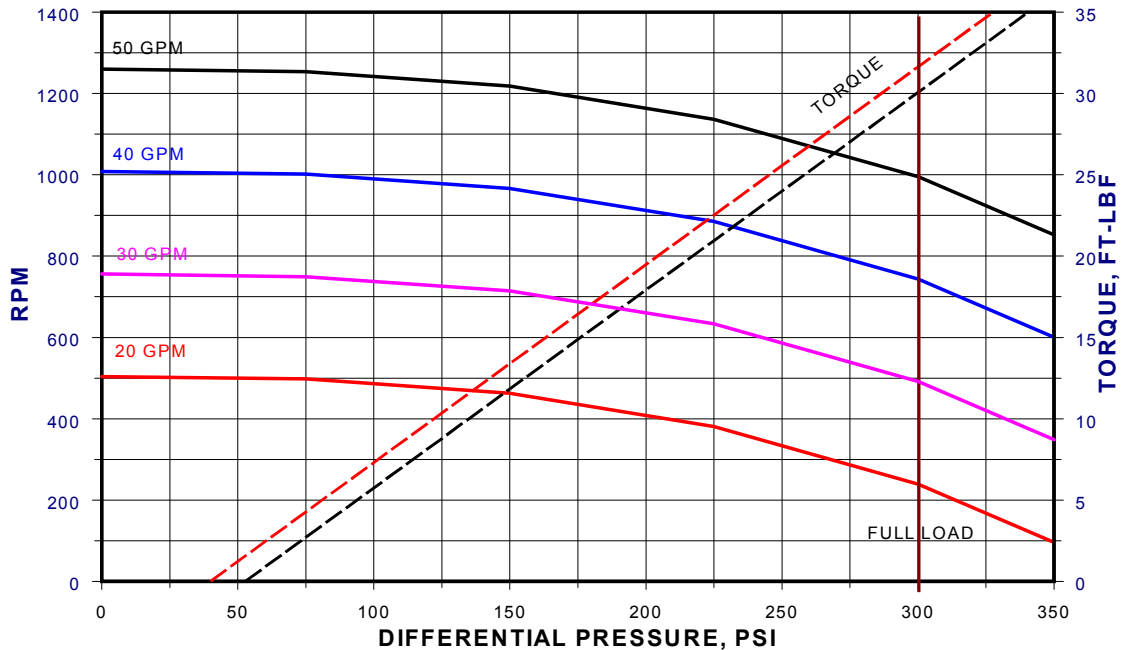

206R1220



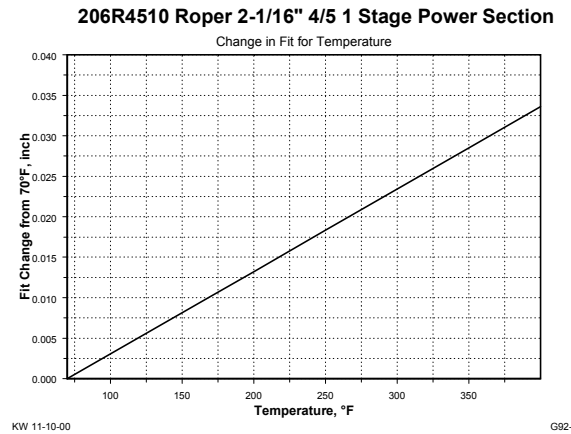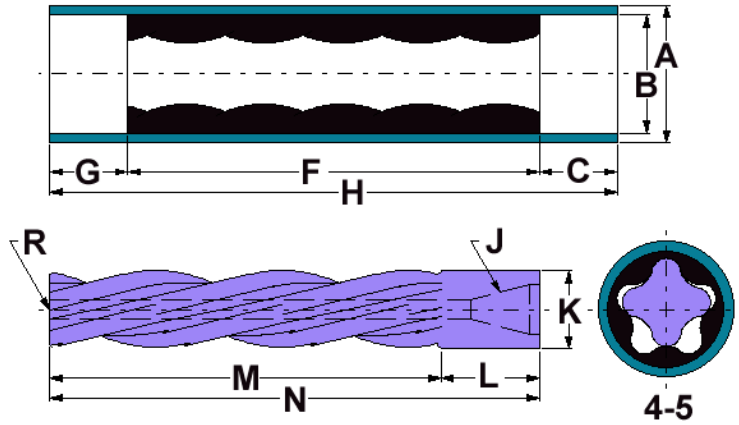


| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|----|----|----|----|----|---|---|---|---|
| 2-1/16 | 1-3/4 | 4 | 27 | 10 | 41 | 28 | 32 | 4 | 1 | — | — |

STD
 STATOR MAJOR DIAMETER 1.479
 STATOR MINOR DIAMETER 1.051
 ROTOR MAJOR DIAMETER 1.285


APPROX STALL TORQUE 75 FT-LBF
 ROTOR ECCENTRICITY .107
 ROTOR WEIGHT 9 LBS.
 STATOR WEIGHT 13 LBS.

PERFORMANCE DATA

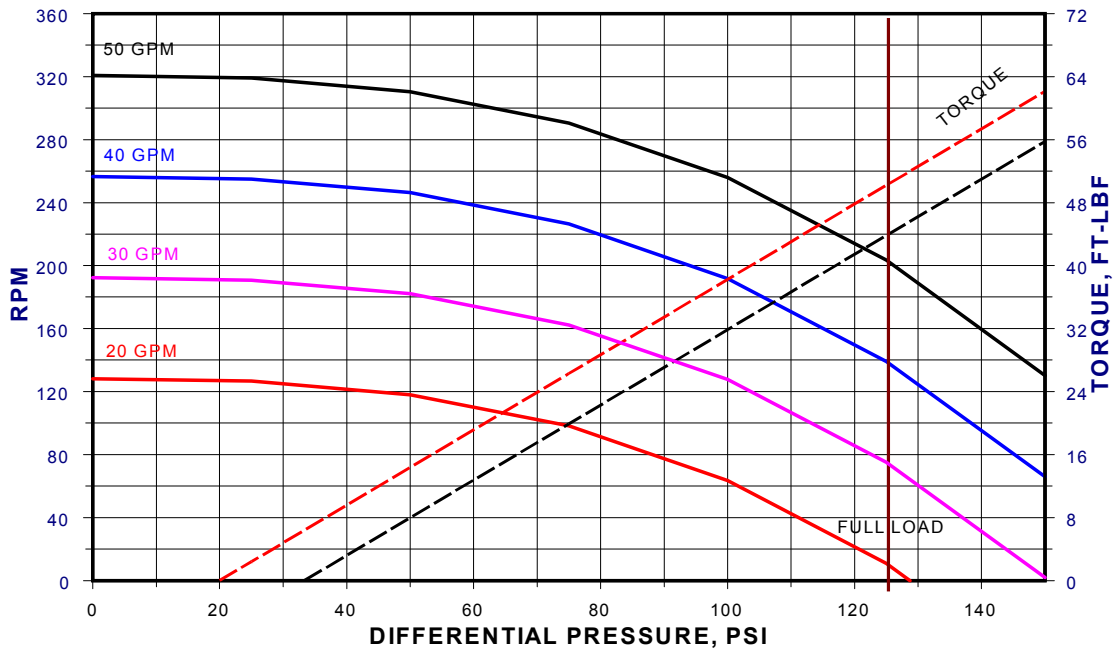


206R4510



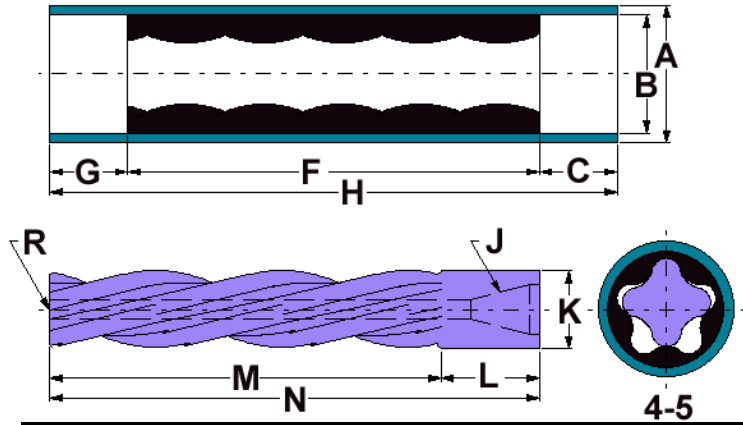

206R4530 Roper 2-1/16" 3 Stage 4/5 Power Section

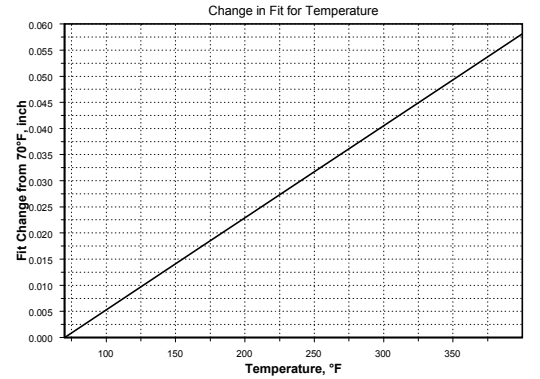


KW 11-10-00

G92-654

| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|----|----|----|----|----|---|---|---|---|
| 2-1/16 | 1-3/4 | 4 | 48 | 10 | 62 | 49 | 53 | 4 | 1 | — | — |



| | | | | |
|-----------------------|-------|-------|---------------------|------------|
| | STD | OVS | APPROX STALL TORQUE | 160 FT-LBF |
| STATOR MAJOR DIAMETER | 1.336 | 1.361 | ROTOR ECCENTRICITY | .096 |
| STATOR MINOR DIAMETER | 0.952 | 0.977 | ROTOR WEIGHT | 14 LBS. |
| ROTOR MAJOR DIAMETER | 1.154 | | STATOR WEIGHT | 20 LBS. |

PERFORMANCE DATA

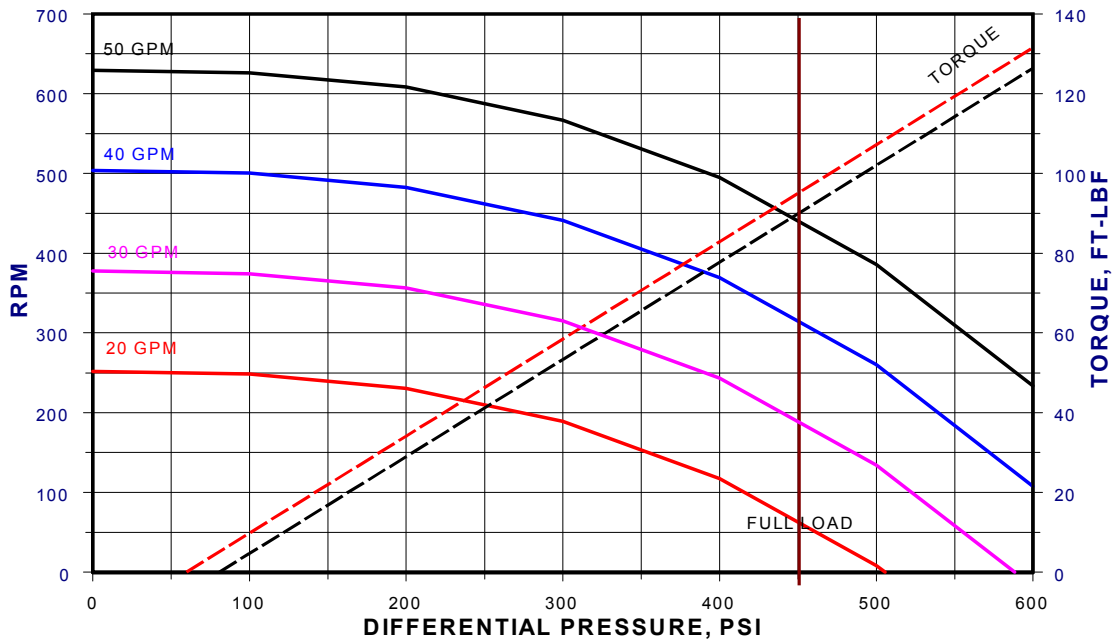

206R4530




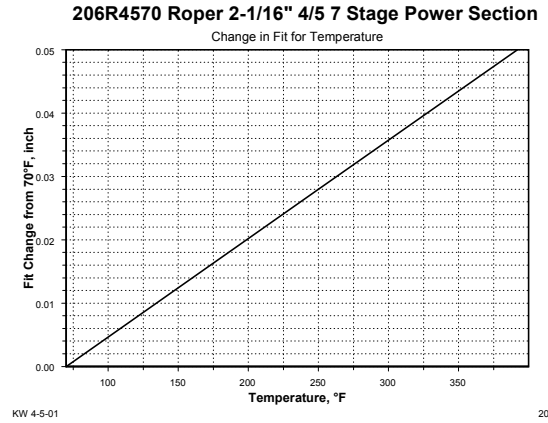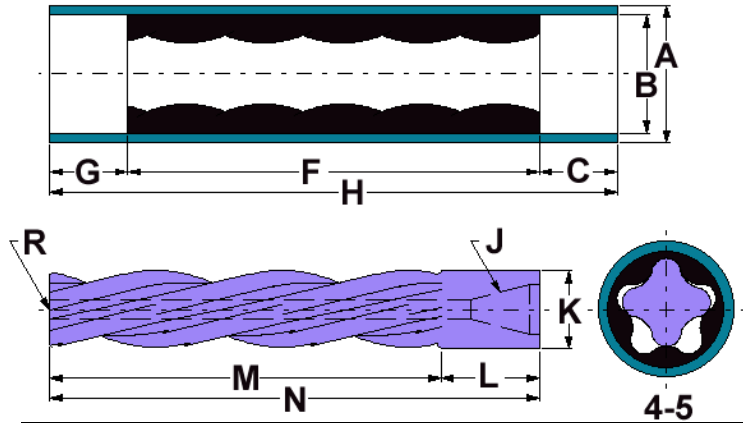

| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|--------|-------|----|----|----|---|-------|---|---|
| 2-1/16 | 1-3/4 | 4 | 75-1/2 | 7-1/2 | 87 | 77 | 81 | 4 | 1-1/8 | — | — |


| | | | |
|-----------------------|-------|---------------------|------------|
| | STD | APPROX STALL TORQUE | 310 FT-LBF |
| STATOR MAJOR DIAMETER | 1.387 | ROTOR ECCENTRICITY | .099 |
| STATOR MINOR DIAMETER | 0.991 | ROTOR WEIGHT | 23 LBS. |
| ROTOR MAJOR DIAMETER | 1.189 | STATOR WEIGHT | 28 LBS. |

PERFORMANCE DATA

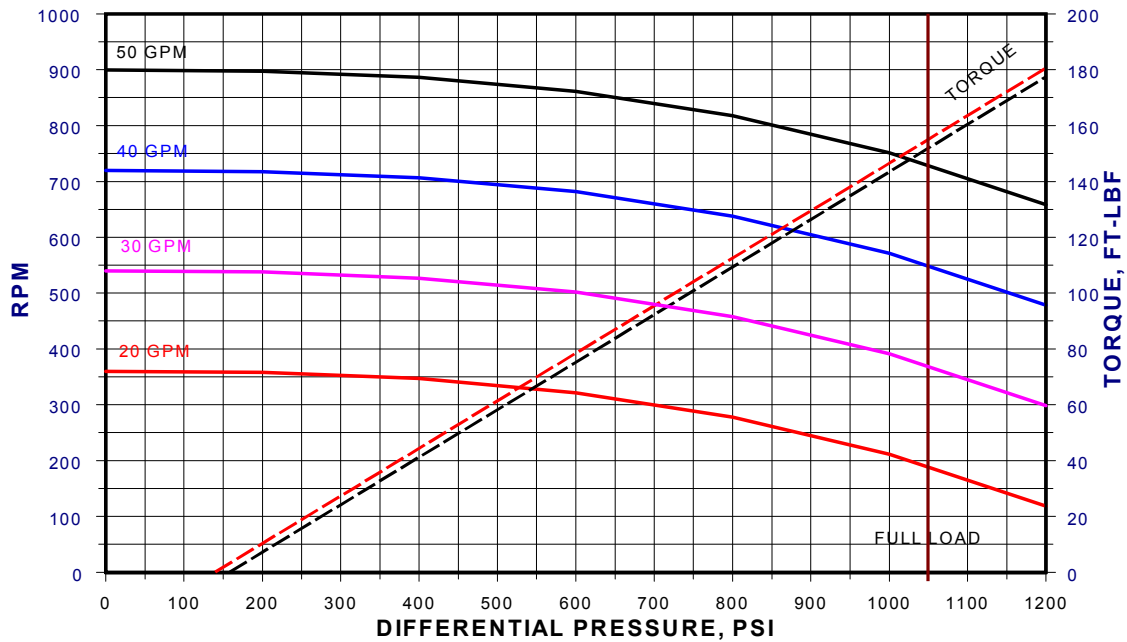


206R4570



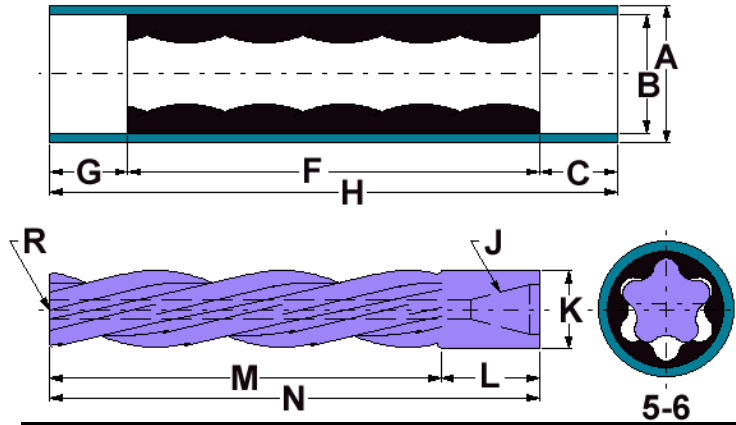

206R5630 Roper 2-1/16" 5/6 3 Stage Power Section
Change in Fit for Temperature

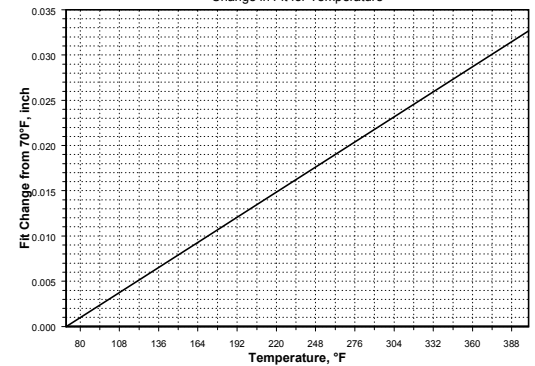


KW 5-11-98

: 092-828

| A | B | C | F | G | H | M | N | L | K | R | J |
|--------|-------|---|--------|-------|----|----|----|---|---|---|---|
| 2-1/16 | 1-3/4 | 4 | 51-1/2 | 7-1/2 | 63 | 53 | 57 | 4 | 1 | — | — |

| | | | | | |
|-----------------------|-------|-------|-------|---------------------|------------|
| | STD | OVS | 2XOVS | APPROX STALL TORQUE | 220 FT-LBF |
| STATOR MAJOR DIAMETER | 1.493 | 1.520 | 1.532 | ROTOR ECCENTRICITY | .094 |
| STATOR MINOR DIAMETER | 1.117 | 1.146 | 1.157 | ROTOR WEIGHT | 21 LBS. |
| ROTOR MAJOR DIAMETER | 1.315 | | | STATOR WEIGHT | 21 LBS. |

PERFORMANCE DATA

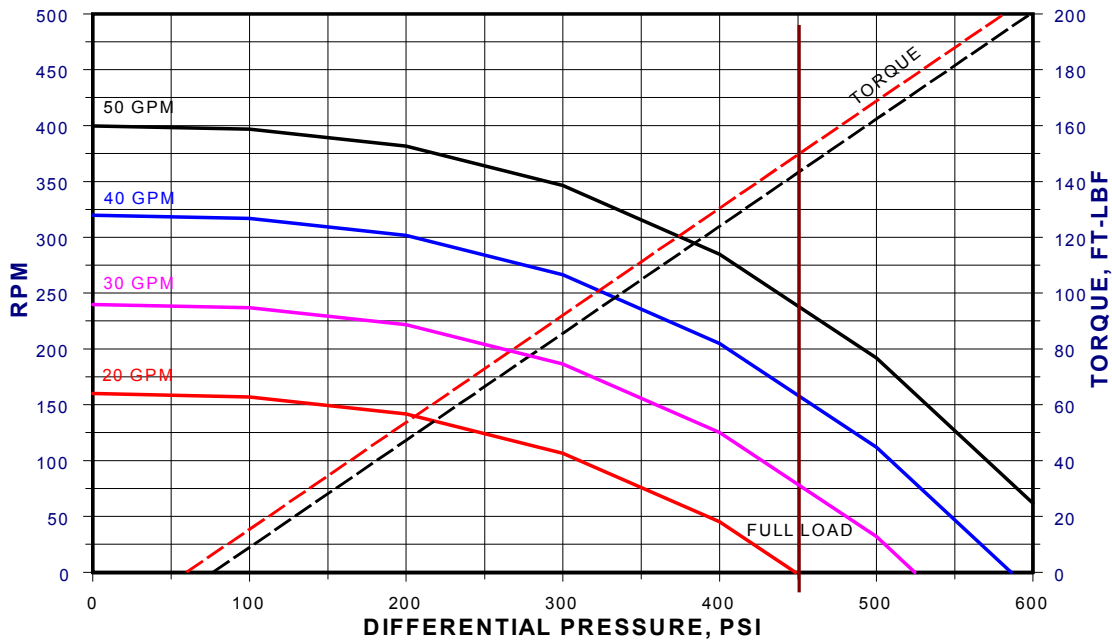

206R5630

